


Synergy 21 LED HID Corn Retrofit E40 360° 54W nw mit ii



kwh/1000h:	54,00
Lumen:	8100
Watt:	54,0
Nennlebensdauer:	35000 Std.
Schaltzyklen:	50000
Opt. Umgebungstemp.:	25 °C

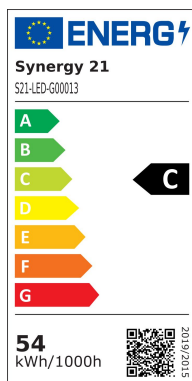

E40 Gewinde-Sockel (E27 auf Anfrage verfügbar)
Ersatz für 200W HPS / MHL



LED: 208*SMD2835 (Samsung)
Farbe: neutralweiss, andere Lichtfarben sind auf Anfrage verfügbar.
Kelvin: 4000K
CRI: >80
Abstrahlwinkel: 360° und Sockel Drehbar um 350°
Wattage (W): 54
Lumen (Lm) : 8100
Abdeckung: milchig
Dimmbar: ja, über smart sensor, siehe Zubehör
Voltage (V): 100-277VAC, 50/60Hz
Durchmesser: 85 mm
Gesamtlänge: 253 mm
Schutzklasse: IP64
Betriebstemperatur: -40°~+60°C

Energieeffizienzklasse: A+
kWh/1000h: 54

Merkmale


Merkmal	Wert
Abstrahlwinkel:	180
CRI:	>80
Dimmbar:	nein
Lichtfarbe:	neutralweiss
Lichtfarbe in Kelvin:	4500
Lumen:	8100
Schutzklasse:	IP64
Sockel:	E40
Gewicht:	0.75 Kg
Garantie:	60.00 Monate

Weitere Bilder

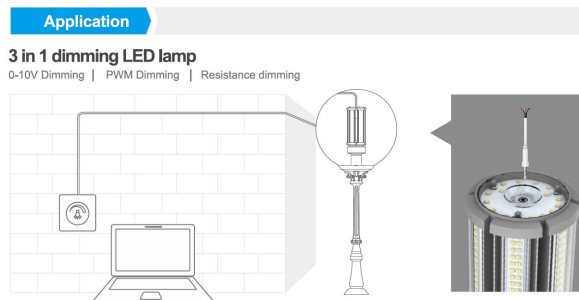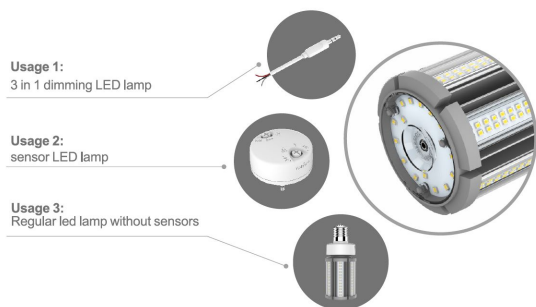


WiFi control LED lamp


APP-Dimming&time control,Support group or single operation

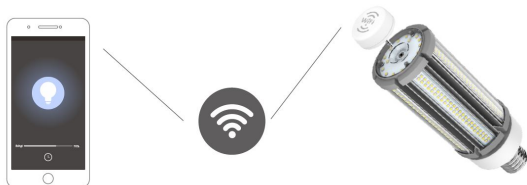

Sensor LED lamp

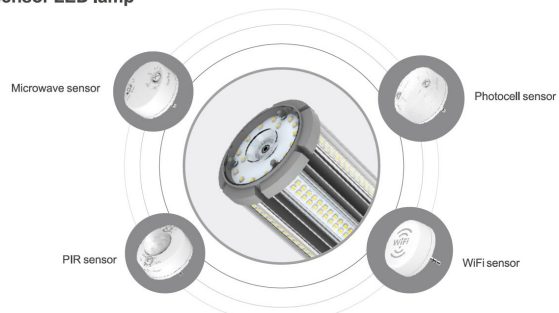

Sensor instruction

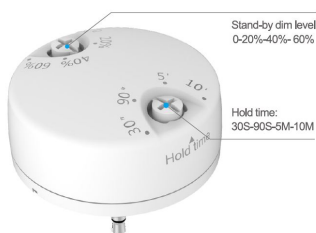


Applicable Sensors				
Interface	MW sensor	Photocell sensor	PIR sensor	WiFi sensor
Hold Time	✓	✓	✓	✓
Stand-by Dim Level	✓	✓	✓	✓
Sensor Detection Area	10 meters	—	6 meters	*
Waterproof	—	—	—	—
External cord	—	—	—	—

* WiFi control area: as long as the lamp and APP is connected to the same router

Installation

Lamp Installation



Step:1


Shown as Figure 1
Remove old ballast or disconnect from existing lamp holder. Remove and dispose of ballast in correct manner. (North America 100-277VAC)

Step:2

Shown as Figure 2
Reconnect directly to the existing lamp holder. (North America 100-277VAC)

Step:3

Shown as Figure 3
Install new LED replacement lamp. Please make sure the old fitting is correctly earth. (North America 100-277VAC)



Zubehör

Art.-Nr.	Name
117502	Synergy 21 LED Adapter für LED-Leuchtmittel E40->E40 lang