


SC/PC-LC/PC Duplex OM3 2.0mm LSZH X m

Dust Cap Color :
Transparent

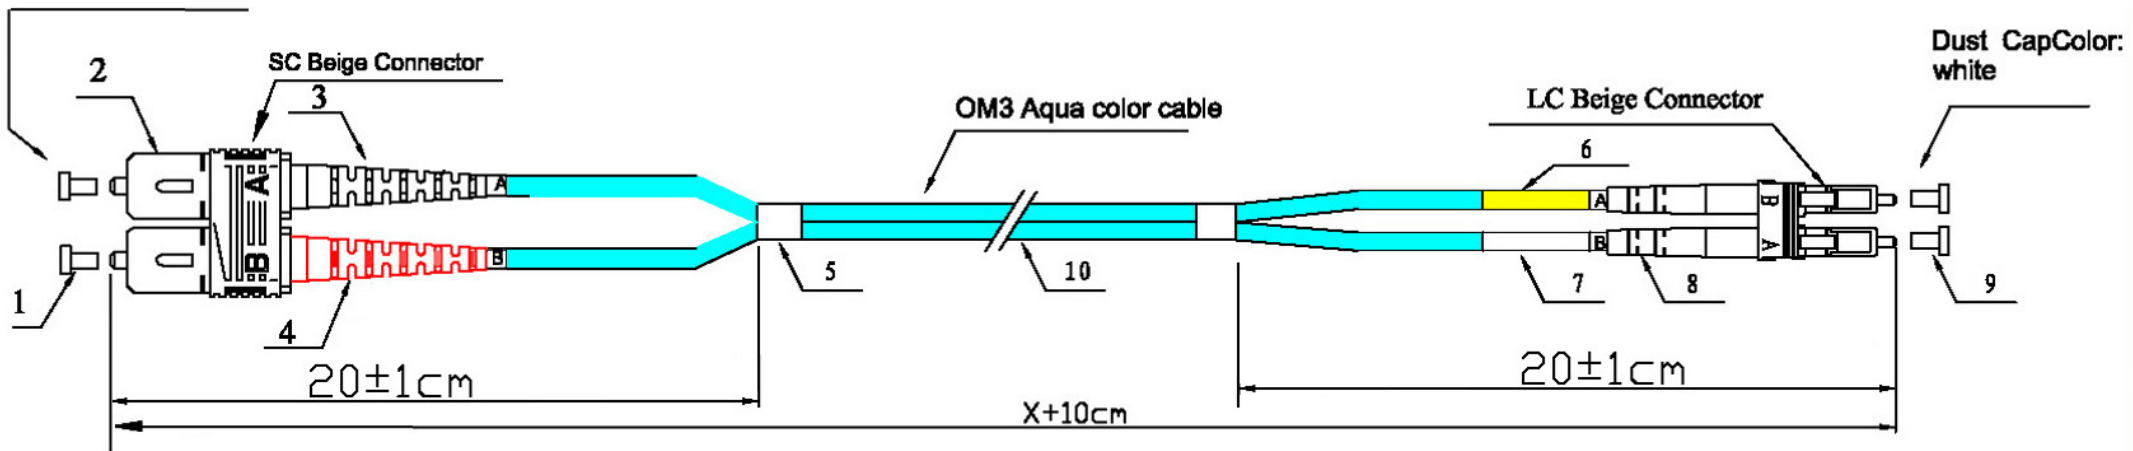

| | | |
|------|----------------------------------|-----|
| 10 | Duplex OM3 2.0mm LSZH Aqua Cable | |
| 9 | DUST COVER | 2 |
| 8 | LC BOOT Beige Color | 2 |
| 7 | White Shrink tube | 1 |
| 6 | Yellow Shrink tube | 1 |
| 5 | Shrink tube | 2 |
| 4 | SC BOOT Red Color | 1 |
| 3 | SC BOOT Black Color | 1 |
| 2 | SC Multimode CONNECTOR | 2 |
| 1 | DUST COVER | 2 |
| ITEM | DESCRIPTION | QTY |

Note:

- 1、 Insertion Loss: $\leq 0.3\text{dB}@850\text{nm}$
- 2、 End surface test is according to OP-03-0500
- 3、 Test standard:GR-326-CORE
- 4、 Test report have to match the serial No
- 5、 ROHS Compliant,Silicon free

Indoor Cable Series(Simplex)

1、 Characteristics

- High strength aramid yarn strength member ensures tension-resistance and long term stability in transmission.
- Small outer diameter,lightweight,flame-retardant,easy to strip , low attenuation,physically soft.
- Direct Interconnect tight buffer cables.
- Suitable for construction operation and convenient for maintenance.

2、 Applications

Building to building interconnection;indoor distribution;cable pigtail of the instrument-type communication equipment,as the moveable connect line for patch cords and connectors


3、 Temperature range:-20℃ ~+70℃

4、 Fiber Optic Cable Performance Properties

- Fiber Count:1
- Outer Diameter.D(mm):2.0*3.8
- Nominal weight(kg/km):4.0
- Max.Tension Short-term:150
Long-term:80
- Min.Bending Radius(mm)Install:20D
Static:10D
- Max.Crush Resistance(N/100mm):500
- Comply with TLA/EIA-568 B.3&Bellcore GR -409-CORE&OFNR-UL/CSA FT-4
- Maximum Attenuation: $\leq 2.5\text{dB}@850\text{nm}$
 $\leq 0.80\text{dB}@1300\text{nm}$


5、 Cable Specifiction

- Fiber Number:Duplex Fiber
- Outer Jacker:LSZH Aqua Color
- Fiber Types:Corning Infinicor OM3 Fiber

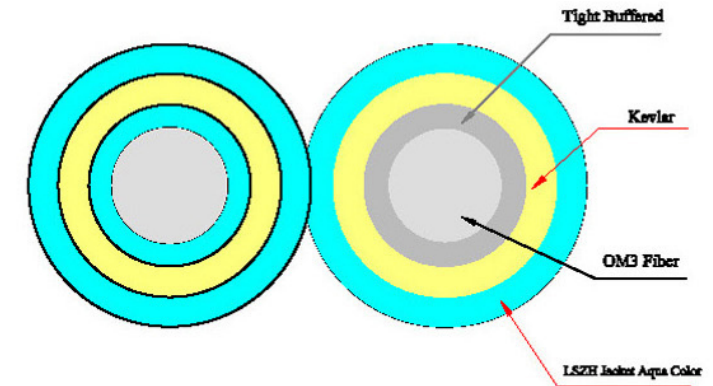

Packing

The corresponding label data for each cable assembly shall be glued to the package

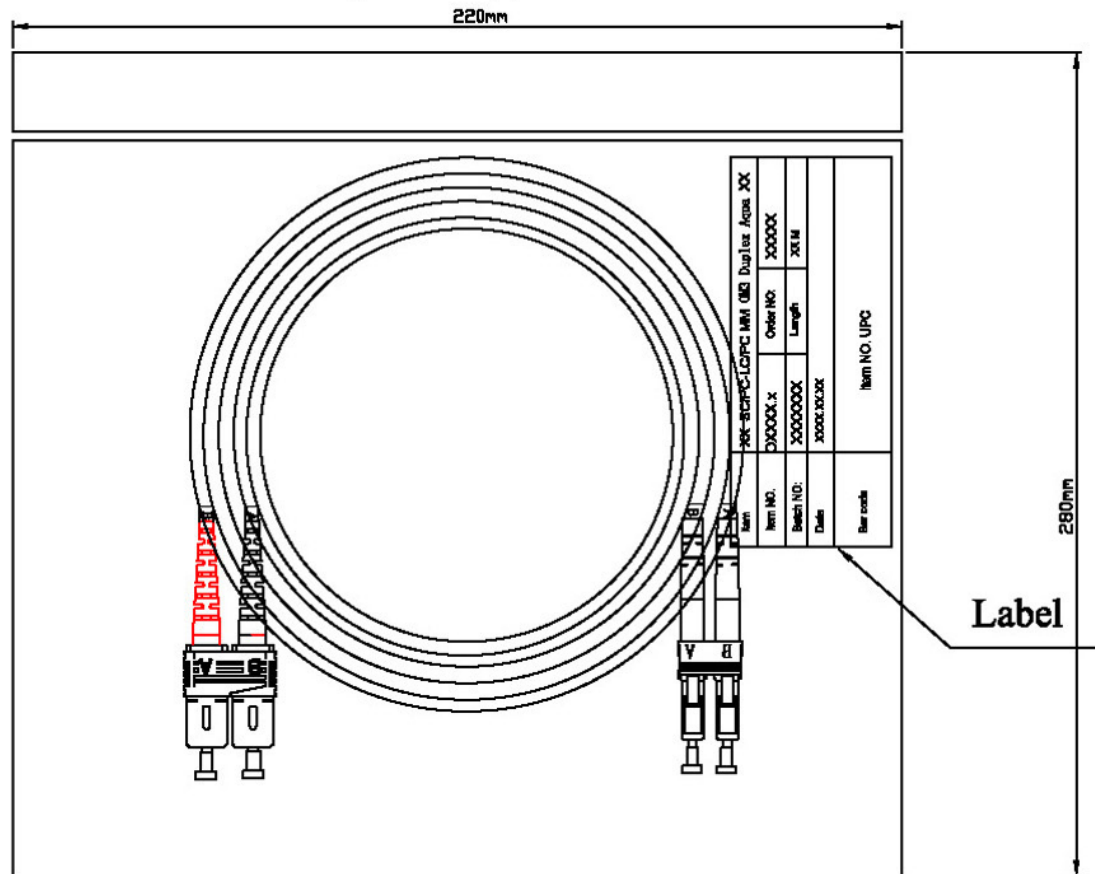

PE Bag

| | | | |
|-----------|--------------------------------------|-----------|-------|
| Item | XX SC/PC-LC/PC MM OM3 Duplex Aqua XX | | |
| Item NO. | XXXXXXXX | Order NO. | XXXXX |
| Batch NO. | XXXXXXXX | Length | XX M |
| Date | XXXX.XX.XX | | |
| Bar code | Item NO. UPC | | |

Label

| | |
|--|------------------------|
| Prüfprotokoll | |
| inspection sheet | |
| TYP: | |
| Stückzahl | 1 |
| quantity | 1 |
| Einfügedämpfung nach DIN 18600 Verfahren 7 | |
| insertion loss acc.to DIN 18600 mode 7 | |
| Wellenlänge 1300 nm | Steckerdämpfung <0.3dB |
| Wavelegth 1300 nm | insertion loss <0.3dB |
| 9 /125 | |
| Datum: 07-05-31 | |
| Achtung LWL Komponenten | |
| attention fiber optic cable | |
| - Vorsichtig handhaben | |
| handle with care | |
| - Mindestbiegeradius von 40mm nicht unterschreiten | |
| do not decrease bending radius of 40mm | |
| - Stecken u. Lösen der Verbindung nur durch Handhabung am Steckergehäuse | |
| Ensure to use only connector body for connection/disconnection | |
| Nicht am Kabel ziehen!!! | |
| never pull at fiber optic cables!!! | |
| - Reklamationen in diesem Bereich können wir nicht anerkennen | |
| complaints in this regard cannot be accepted | |
| - Ferrulen stets durch Staubschutzkappe schützen und vor jedem Einsatz säubern | |
| ferrules must be protected via dust cap and must be cleaned before use | |

Test Report