

Synergy 21 LED Spot Pendelleuchte UFO zub. Radar Sensor




Input Voltage:	120-277Vac, 50Hz
Road Load:	400W@120Vac, 800W@220-277Vac (inductive) 800W@120Vac, 1200W@220-277Vac (resistive)
IP rating:	IP65
Operation Temperature:	-35°~70°C
Mounting high:	15m max
Detecting zone:	Max (DxH) 16m*15m
Function:	2 Step /3 Step Dimming/ On Off Function
Hold time:	5s/30s/90s/3min/20min/30min
Detection sensitivity:	50% / 100%
Daylight sensor:	50lux / 100lux / 200lux / Disable
Stand-by period:	5s / 5min / 10min / 30min / 1h / Disable
Stand-by dimming level:	10% / 20% / 30%/ 50%

Merkmale


Merkmal	Wert
Betriebstemperatur:	-35 bis +70
LED - Gehäusefarbe:	weiß

Merkmal	Wert
Schutzklasse:	IP65, IK10
Gewicht:	0.15 Kg
Garantie:	60 Monate

Weitere Bilder

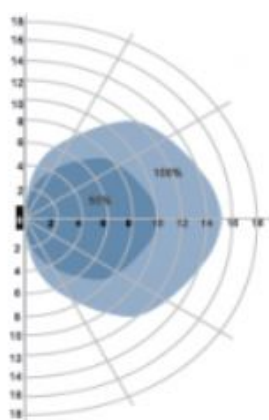

Wall mounting pattern (Unit: m)

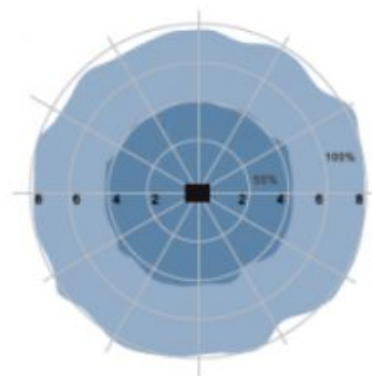

Ceiling mounting pattern (Unit: m)

ON	1
I	ON 100%
II	- 50%

Detection area

Detection area can be reduced by selecting the combination on the DIP switches to fit precisely each application.

ON	2	3	4
I	ON ON ON 5s		
II	- ON ON 30s		
III	ON - ON 90s		
IV	- - ON 300s		
V	ON ON - 300s		
VI	- - - 300s		

Hold time

Refers to the time period the lamp remains at 100% illumination after no motion detected.

ON	5	6	7
I	ON ON ON 400		
II	- ON ON 60min		
III	ON - ON 90min		
IV	- - ON 30min		
V	ON ON - 5min		
VI	- - - 5s		

Stand-by period

Refers to the time period the lamp remains at a low light level before it completely switches off in the long absence of people. When set to Disable mode, the low light is maintained until motion is detected.

ON	8	9
I	ON ON 50%	
II	- ON 30%	
III	ON - 20%	
IV	- - 10%	

Stand-by dimming level

The low light level you would like to have after the hold time in the long absence of people.

ON	10	11	12
I	ON ON ON Disable		
II	- ON - 200lux		
III	ON - - 100lux		
IV	- - - 50lux		

Daylight sensor

The sensor can be set to only allow the lamp to illuminate below a defined ambient brightness threshold.

When set to Disable mode, the daylight sensor will switch on the lamp when motion is detected regardless of ambient light level.

Note that daylight sensor is active only when lamp totally switches off.

Zubehör

Art.-Nr.	Name
124243	Synergy 21 Netzteil - DALI Controller Mean Well
148726	Synergy 21 Netzteil - Wasserdichte Verbinder 1:1
148727	Synergy 21 Netzteil - Wasserdichte Verbinder 1:2
148730	Synergy 21 Netzteil - Wasserdichte Verbinder Box 3 Ports
148729	Synergy 21 Netzteil - Wasserdichte Verbinder Box 3 Ports transparent
148728	Synergy 21 Netzteil - Wasserdichte Verbinder Box 4 Ports