


# ANALOG & ANALOG PWR



**Give IoT connectivity to wired analog sensors.**

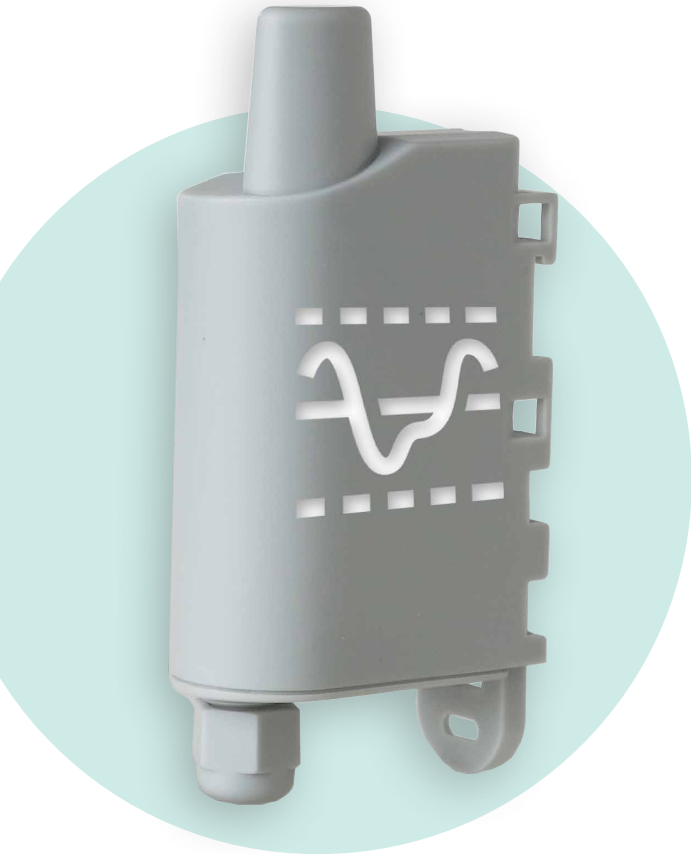

**ALERT**

- Provide warnings should thresholds be exceeded



**MEASURE**

- Monitor the humidity rate, and machine consumption
- Measure a filling level
- Analyse the presence of gas



**MONITOR**

- Monitor changes in temperatures, the humidity rate, pressure, etc.



**FUNCTION**

Analog interface

## BENEFITS

- 2 inputs: 0-10V or 4-20mA
- Possibility of triggering measurement via 2 dedicated inputs
- Locally and remotely configurable
- Low power consumption for optimal autonomy
- Develop new preventive maintenance services, alerts services, or analysis services.



## PRODUCT USES



Measure the continuous filling level of a tank.



Giving IoT connectivity to industrial sensors already installed on a production site.

## TECHNICAL SPECIFICATIONS

- Periodic modes or event-based modes
- Replaceable battery/external power supply (PWR version)
  - Dimensions: 105 x 50 x 27 mm
  - Box: IP67 (IP68 on request)
- Integrated fastening system: DIN rail, tube, wall, flange
  - Configurable Life Screen
- Zone: Sigfox: RC1 / LoRaWAN: EU863-870 / WM-Bus: 868
- Operating temperature range: -25°C / +70°C
  - Weight: 70 g
  - Standards: Directive 2014/53/EU (RED)
- Alert concerning product error, configuration error, low battery