
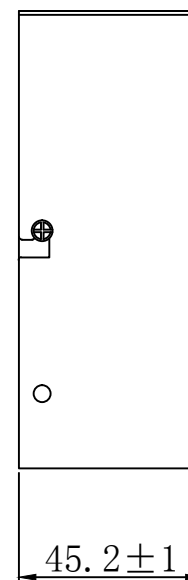
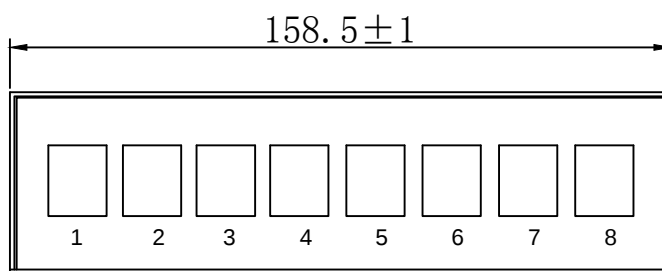
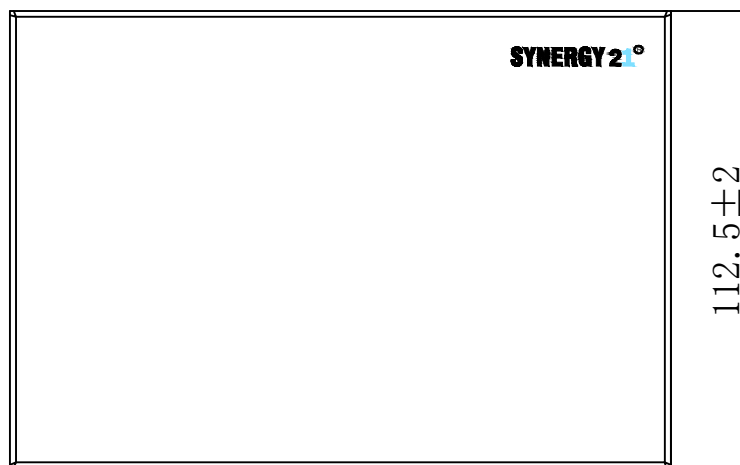


SYNERGY 21[®]

"SYNERGY 2[®]" for black printing The pantone of Color is black c

"1" for blue printing The pantone of Color is 298C

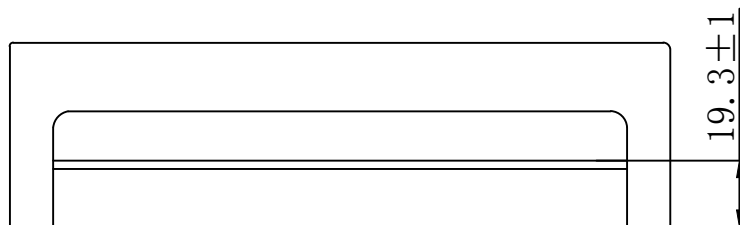


NOTE:

1. RoHS 2.0 and Reach Complinat
2. PACKING: 1pcs/BOX+labe


Accessory:

1. Cable Tie (75X1.9mm) × 8Pcs
2. Foot pad × 4Pcs
3. M4 Screw × 2pcs



②	Top Cover	1.0mm thickness Metallic Panel with plastic powder cladding Gray RAL7035	1		SYNERGY 21					
①	Bottom Panel	1.2mm thickness Metallic Panel with plastic powder cladding Gray RAL7035	1							
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK	CUSTOMER		ITEM NO.	S216375		
					PRODUCT NAME	Desktop Consolidation Point Box 8 port	manufacture country	China	UNIT	MM
					DRAWNBY	CHECKBY	APPOBY	DATE		
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.	SYNERGY 21	SYNERGY 21	SYNERGY 21	2020-02-18		



16.5±0.2

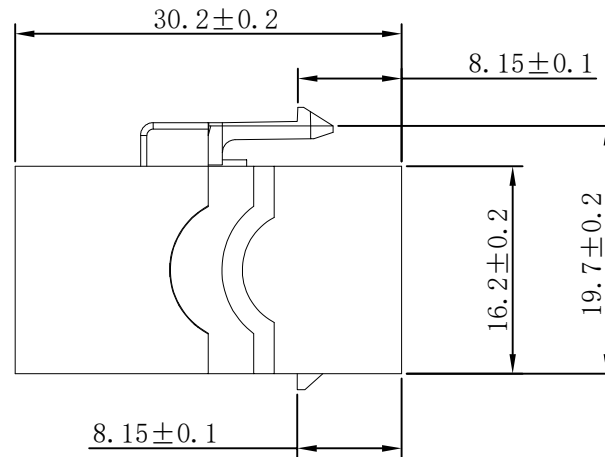

Connection Method

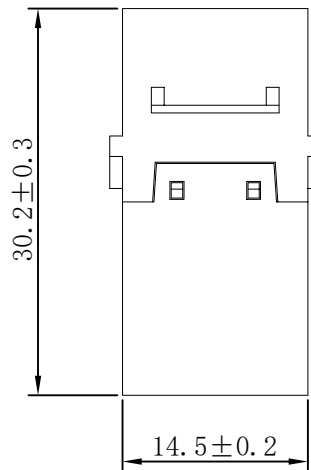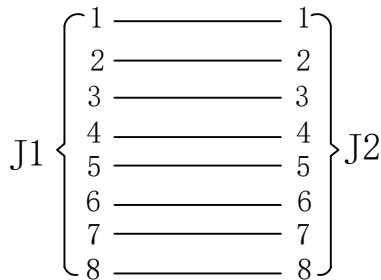

NOTES:

ELECTRICAL:

- Contact Resistance : 20MΩ MAX
- Insulation Resistance : 500MΩ MIN @ 500V DC
- Withstand Voltage : DC 1000V AC 700V RMS 60Hz, 1MIN
- Component testing for Cat.6A to ISO/IEC 11801 Ed.2.2:2011-06
DIN EN 50173-1:2011-09
TIA/EIA-568.2-D (2009-08)

ENVIRONMENTAL:

- Storage : -40℃ T0+70℃
- Operation : -10℃ to+60℃

MECHANICAL

- RJ45 Contact Life: 750 Times Min
- Plug inforce:<30N

RoHS 2.0 and REACH Compliant

PACKING:1PCS/PE bag+lable1,10PCS/PE Bag+Lable 2, 50PCS/small box,xxPCS/CTN+LABLE 3

MATERIAL LIST:

④	Shrapnel	PC White	1	
③	Contact	8P8C Gold Plated	16	
②	Housing	Zinc Alloy	1	
①	PCB	FR-4, t=0.8	1	
NO	MAT. NAME	DESCRIPTION	QT'Y	REMARK

						PRODUCT NAME	CAT. 6A STP RJ45 F/F Coupler Keystone jack Type Zinc Alloy Housing	manufacture country:	CHINA	UNIT	MM
		NEW			2025-4-2	A0	DRAWNBY	CHECKBY	APPOBY	DATE	
BY	CHK	REVISION RECORD MODIFICATIONS			DATE	REV.	SYNERGY 21	SYNERGY 21	SYNERGY 21	2025-4-2	