

ALLNET IP Kamera Fix Dome / Outdoor / 5MP / IR / Vandalismus

>>> [Vers l'article de la boutique en ligne](#)



EAN CODE



ALLNET IP Camera Fix Dome / Outdoor / 5MP / IR / Vandalism / Low-Light / Motorized varifocal lens / 93° / "ALL- CAM2495v3-LVEFN"


Highlights:

- **Optics**
 - 1/2.7", with light source
 - SmartIR, up to 50m (164 ft) IR distance
 - Up to 120 dB optical WDR (Wide Dynamic Range)
- **Compression**
 - Ultra 265, H.265, H.264, MJPEG
 - Triple streams
 - 2592*1944@20fps in main stream
 - ROI (Region of Interest)
- **Network**
 - ONVIF compliance
- **Setup**
 - DC12V or PoE power supply
 - Wide voltage range of $\pm 25\%$ in DC
 - Micro SD, up to 256 GB
 - Alarm 1 input and 1 output, audio 1 input and 1 output
 - IP67 ingress protection
 - IK10 vandal resistant

Key Features



Dimensions

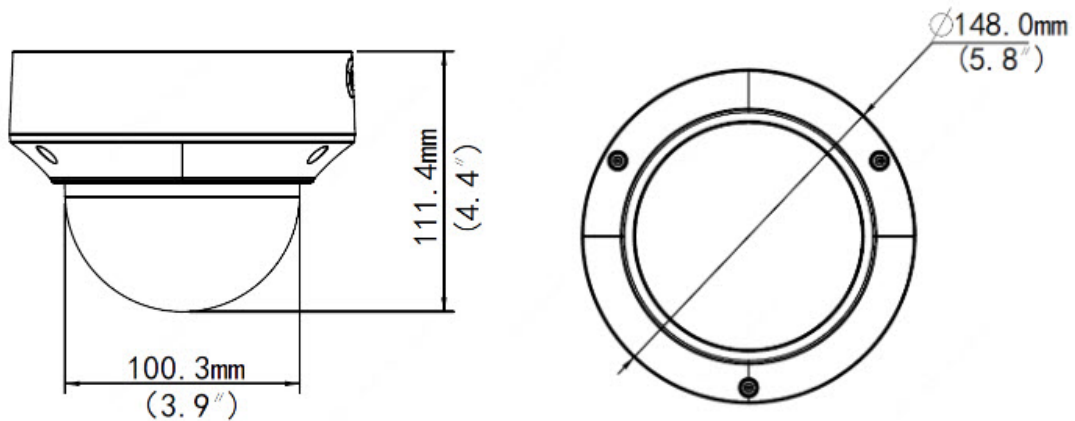

Technical Details:

ALL-CAM2495v3-LVEFN					
Camera					
Sensor	1/2.7", 5.0 megapixel, progressive scan, CMOS				
Lens	2.7~13.5mm@F1.2, AF automatic focusing and motorized zoom lens				
Iris	Auto aperture				
DORI Distance	Lens (mm)	Detect (m)	Observe (m)	Recognize (m)	Identify (m)
	2.7	70.9(232.5ft)	28.4(93.0ft)	14.2(46.5ft)	7.1(23.3ft)
	13.5	247.5(812.0ft)	99.0(324.8ft)	49.5(162.4ft)	24.8(81.2ft)
Angle of View (H)	26.8°~93.1°				
Angle of View (V)	20.7°~66.0°				



No. d'article: 209791
 Numéro de fabricant: ALL-CAM2495v3-LVEFN

Angle of View (O)	31.6°~121.0°		
Shutter	Auto/Manual, 1 ~ 1/100000s		
Adjustment angle	Pan: 0°~355°	Tilt: 0°~80°	Rotate: 0°~355°
Min. Illumination	Colour:0.002lux (F1.2, AGC ON) 0 lux with IR		
WDR	120dB		
Day/Night	IR-cut filter with auto switch (ICR)		
IR Range	Up to 50m (164 ft) IR range		
Wavelength	850nm		
IR On/Off Control	Auto/Manual		
Defog	Digital Defog		
Video			
Video Compression	Ultra 265, H.265, H.264, MJPEG		
Frame Rate	Main Stream: 5MP(2592*1944),Max 20fps; 4MP(2560*1440),Max 30fps; Sub Stream: 2MP (1920*1080), Max 30fps; Third Stream: D1 (720*576), Max 30fps		
Video Bit Rate	128 Kbps~16 Mbps		
ROI	Supported		
Video stream	Triple streams		
OSD	Up to 8 OSDs		
Privacy Mask	Up to 8 areas(8 blacks/8 mosaics)		
Image			
White Balance	Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2		
Digital noise reduction	2D/3D DNR		
Smart IR	Support		
Flip	Normal/Flip Vertical/Flip Horizontal/180°/90°Clockwise/90°Anti-clockwise		
HLC	Support		
BLC	Support		
Events			



No. d'article: 209791
 Numéro de fabricant: ALL-CAM2495v3-LVEFN

General Function	Watermark, IP Address Filtering, Alarm input, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication
Audio	
Audio Compression	G.711U, G.711A
Two-way Audio	Supported
Suppression	Supported
Sampling Rate	8KHZ
Storage	
Edge Storage	Micro SD, up to 256 GB
Network Storage	ANR,NAS(NFS)
Network	
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, RTMP
Compatible Integration	ONVIF (Profile S, Profile G, Profile T), API
Client	EZStation EZLive Ezview
Web Browser	Plug-in required live view: IE9+, Chrome 41 and below, Firefox 52 and below
Interface	
Audio I/O	Audio cable
	1 Input: impedance 35k?; amplitude 2V [p-p]
	1 output: impedance 600?; amplitude 2V [p-p]
Alarm I/O	1/1
Network	1 * RJ45 10M/100M Base-TX Ethernet
Certification	
Certifications	CE: EN 60950-1 UL: UL 60950-1 FCC: FCC Part 15
General	
Power	DC12V(±25%), PoE(IEEE 802.3af)
	Power consumption: Max 8W
	Support overcurrent protection, Input short circuit protection



No. d'article: 209791
Numéro de fabricant: ALL-CAM2495v3-LVEFN

Dimensions (Ø x H)	148.0 x 111.4mm (5.8" x 4.4")
Weight	0.93kg(2.05lb)
Working Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: 95% RH (non-condensing)
Storage Environment	-40°C ~ 70°C (-40°F ~ 158°F), Humidity: 95% RH (non-condensing)
Surge protection	6KV
Vandal Resistant	IK10
Ingress Protection	IP67

Accessoires

No. d'article	Désignation
159713	ALLNET ALL-CAM2495-LVEFN zbh. Wallmount mit Junction Box
159714	ALLNET ALL-CAM2495-LVEFN zbh. Deckeneinbau/In-Ceiling mount
159711	ALLNET ALL-CAM2495-LVEFN zbh. Wallmount mit Junction Box
99305	ALLNET ALL95100 / TP Cat 6 Gigabit surge arrester
186548	ALLNET Injecteur PoE Gigabit PoE & PoE+ (15,4W/30W)
112270	ALLNET ALL048900V2 / Power over Ethernet Injector AT++ 90W
113046	ALLNET ALL048605PD / unmanaged 5 Port Gigabit PoE Switch
99315	ALLNET ALL8804PoE+ / unmanaged 8 port Gigabit Switch HPoE, 2
93392	ALLNET ALL8808POE / 8 ports Gigabit Full PoE Switch
193997	ALLNET Switch full managed 8 port Gigabit 130W / 8x PoE+ /
193997	ALLNET Switch full managed 8 port Gigabit 130W / 8x PoE+ /
194025	ALLNET Switch full managed 24 Port Gigabit 390W / 24x PoE+
112082	ALLNET ALL-SG8826PMX-10G / full managed 24 Port Gigabit/2x S
200625	ALLNET Videoserver NVR Box mit Networkoptix Server, RK3399, 2GB, ALL2288
124355	Networkoptix IP Nx-Professional Videomanagement Software 1 Kanal "X86 Platform"
162926	Networkoptix IP Nx-Professional Videomanagement Software 4 Kanal "X86-Platform"
162927	Networkoptix IP Nx-Professional Videomanagement Software 8 Kanal "x86 Platform"



No. d'article: 209791
Numéro de fabricant: ALL-CAM2495v3-LVEFN

No. d'article	Désignation
146999	ALLNET PoE USV Backup - USV für Kameras, Accesspoints ALL900

[Cliquez ici pour découvrir d'autres articles de cette catégorie dans notre boutique.](#)