




FIREBOX M4800 & M5800

Up to 87 Gbps firewall throughput and 11.3 Gbps UTM throughput

TOP OF THE LINE PERFORMANCE & SECURITY

With firewall throughput of up to 87 Gbps and UTM throughput up to 11.3 Gbps, the Firebox® M4800 and M5800 are our fastest Firebox appliances ever. This level of performance, paired with powerful security, flexible high-port density, and affordability makes these the ideal solutions for distributed, hub-and-spoke type deployment scenarios.

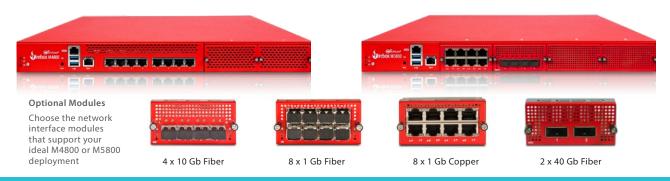

WatchGuard's Firebox M4800 and M5800 appliances bring serious security to the midmarket, while giving us the ability to maintain visibility across our customer's network using the fastest, highest performing UTM solution available

TOTAL NETWORK PROTECTION

66

Every network needs a full arsenal of scanning engines to protect against spyware, viruses, malicious apps, botnets and more. Typically deployed at the corporate headquarters, Firebox M4800/M5800 appliances serve as the "hub," responsible for managing and providing layered security for all communications between the head office and all remote employee and business sites.

A CLOUD'S-EYE VIEW OF YOUR ENTIRE NETWORK

WatchGuard Cloud provides full visibility into your network so that you can make timely, informed, and effective decisions about your network security anywhere, anytime. The platform displays 100+ dashboards and reports that allow you to quickly see high-level trends and anomalies, then drill down into detailed information on each.

EXPANSION MODULES FOR GREATER PORT DENSITY

Firebox M4800/M5800 appliances provide greater port density options that enable IT professionals to add additional network modules with more fiber or copper ports. Each appliance has two available slots for expansion modules, with options for 4 x 10 Gb fiber, 8 x 1 Gb copper, or 8 x 1 Gb fiber. Module options are identical to those on our mid-range Firebox devices, for even more flexibility.

AUTOMATION TO THE CORE

WatchGuard Firebox M Series appliances are designed with automation to the core, allowing your IT team to do more with less. The WatchGuard Automation Core makes it possible to deploy from the Cloud, block threats, update signatures, and detect and kill malware, all without lifting a finger.

FEATURES & BENEFITS

- Up to 87 Gbps firewall throughput. Turn on all security scanning engines and still see an amazing 11.3 Gbps throughput.
- All logging and reporting functions included with purchase, with over 100 dashboards and reports including PCI and HIPAA.
- Customize your port configuration to meet current needs, knowing you have the flexibility to adapt as the network evolves. This is how to future-proof your network and eliminate costly rip-and-replace scenarios.
- Redundant hot-swap power supplies ensure maximum availability.
- Access Portal is a clientless VPN solution that comes standard with every Firebox and provides secure remote access to remote users.

Firebox	M4800	M5800		
	base + 4 x 10 Gb interfaces	base + 4 x 10 Gb interfaces		
THROUGHPUT ¹	52.61			
UTM (full scan) ²	5.2 Gbps	11.3 Gbps		
Firewall (IMIX)	16.0 Gbps	25.0 Gbps		
VPN (IMIX) HTTPS (IPS enabled, full	4.8 Gbps	5.2 Gbps		
scan)	3.0 Gbps	4.9 Gbps		
Antivirus	12.5 Gbps	22.0 Gbps		
IPS (full scan)	8.1 Gbps	12.5 Gbps		
Firewall (UDP 1518)	49.6 Gbps	87.0 Gbps		
VPN (UDP 1518)	16.4 Gbps	18.8 Gbps		
CAPACITY				
Interfaces 10/100/1000*	8 x 1 Gb	8 x 1 Gbps and 4X 10 Gb		
I/O interfaces	1 serial/2 USB	1 serial/2 USB		
Concurrent connections	15,000,000	30,800,000		
Concurrent connections (proxy)	750,000	1,000,000		
New connections per second	254,000 328,000			
VLANs	1,000	Unrestricted		
WSM licenses (incl)	9	9		
TDR Host Sensors included	250	250		
VPN TUNNELS				
Branch Office VPN	5,000	unrestricted		
Mobile VPN	10,000	unrestricted		
SECURITY FEATURES				
Firewall	Stateful packet inspection, T firewall	LS decryption, proxy		
Application proxies	HTTP, HTTPS, FTP, DNS, TCP/UDP, POP3S, SMTPS, IMAPS and Explicit Proxy			
Threat protection	DoS attacks, fragmented & malformed packets, blended threats			
Filtering options	Browser Safe Search, Googl	e for Business		
VPN	IVE 2 IDCas Deliguand Dev			
Site to Site VPN	IKEv2, IPSec, Policy and Route Based Tunnels, TLS hub and spoke			
Remote Access VPN	IKEv2, IPSec, L2TP, TLS			
VISIBILITY				
Logging and notifications	WatchGuard Cloud & Dimen v3	sion, Syslog, SNMP v2/		
Reporting	WatchGuard Cloud includes reports, executive summary	over 100 pre-defined and visibility tools		
CERTIFICATIONS				
Security	Pending: CC EAL4+, FIPS 14	0-2		
Safety	NRTL / CB			
Network	IPv6 Ready Gold (routing)			
Hazardous substance control	WEEE, RoHS, REACH			
NETWORKING				
SD-WAN	Multi-wan failover, dynamic path selection, jitter/ loss/latency measurement			
Dynamic Routing	RIP, OSPF, BGP			
High Availability	Active/passive, active/active			
QoS	802.1Q, DSCP, IP Precedence			
Traffic Management	By policy or application			
IP address assignment				
NAT	Static, DHCP (server, client, relay), PPPoE, DynDNS Static, dynamic, 1:1, IPSec traversal, policy-based			
Link aggregation	802.3ad dynamic, static, act	пле/раскир		

PHYSICAL AND POWER SPECIFICATIONS	M4800	M5800	
Product Dimensions	17.2″ x 1.73″ x 12.6″ (438 x 44 x 320mm)	17″ x 1.75″ x 12.08″ (431 x 44 x 307 mm)	
Shipping Dimension	22.0″ x 21.3″ x 5.1″ (560 x 540 x 130mm)	18″ x 21″ x 5.25″ (45.7 x 53.3 x 13.3 cm)	
Shipping Weight	18.9 lbs (8.5Kgs)	17 lbs (7.7 Kgs)	
Power	Dual power supplies 300W 100-240VAC/5- 3A/50-60Hz	Dual power supplies 400W 100-240VAC/6-3A/47-63Hz	
Power Consumption	130W	193W	
Shipping Weight	38 lb (17 kg)	46 lb (21 kg)	
Shipping Dimensions	588mm x 648 mm x 200mm (W x D x H)	788mm x 588mm x 215mm (W x D x H)	
Product Weight	8 kg (17.63 lbs)	12 kg (26.45 lbs)	
Product Dimensions	205mm L, 50.5mm W, 40mm H (8.1″ L, 2″ W, 1.6″ H)	220mm L, 50.5mm W, 40mm H (8.7″ L, 2″ W, 1.6″ H)	
ENVIRONMENT	OPERATING	STORAGE	
Temperature	32° F to 104° F 0° C to 40° C	-40° F to 158° F -10° C to 70° C	
Relative Humidity	5% to 90% non-condensing	5% to 90% non-condensing	
Altitude	0 to 9,843 ft at 95° F (3,000 m at 35° C)	0 to 15,000 ft at 95° F (4,570 m at 35° C)	
MTBF M4800	63,983 hours @ 77° F (25° C)		
MTBF M5800	86,999 hours @ 77° F (25° C)		
MTBF Module	3,863,276 hours @ 77° F (25° C)		

STRONG SECURITY AT EVERY LAYER

Uniquely architected to be the industry's smartest, fastest, and most effective network security products, WatchGuard solutions deliver in-depth defenses against advanced malware, ransomware, botnets, trojans, viruses, drive-by downloads, data loss, phishing and much more.

Services	Support	TOTAL SECURITY	Basic Security
Stateful Firewall	√	✓	✓
VPN	√	✓	√
SD-WAN	√	✓	√
Access Portal	√	✓	√
Service de prévention des intrusions (IPS)		✓	√
Contrôle des applications		✓	√
WebBlocker (filtrage d'URL)		✓	√
spamBlocker (antispam)		✓	√
Gateway AntiVirus (GAV, Antivirus de passerelle)		✓	~
Reputation Enabled Defense (RED, Autorité de réputation)		✓	✓
Network Discovery (Découverte réseau)		✓	√
APT Blocker		✓	
Threat Detection & Response		✓	
DNSWatch		✓	
IntelligentAV		✓	
WatchGuard Cloud Visibility Conservation des données		30 Jours	1 Jour
Support	Standard (24 h/24, 7 j/7)	Gold (24 h/24, 7 j/7)	Standard (24 h/24, 7 j/7)

For details, talk to your authorized WatchGuard reseller or visit www.watchguard.com.

¹Throughput rates are determined using multiple flows through multiple ports and will vary depending on environment and configuration. Max firewall throughput tested via direct connection using 1518 byte UDP frame based on RFC 2544 methodology. All testing performed on Fireware version 12.5.1.

² UTM throughput is measured using HTTP traffic with AV, IPS, and Application Control enabled, and does not account for all security services available on the appliance.

Contact your WatchGuard reseller or call WatchGuard directly (1.800.734.9905) for help determining the right model for your network. Visit **www.watchguard.com/sizing** to access the online Product Sizing Tool.

U.S. SALES 1.800.734.9905 INTERNATIONAL SALES +1.206.613.0895 WEB www.watchguard.

WatchGuard Technologies, Inc.

No express or implied warranties are provided for herein. All specifications are subject to change and expected future products, features or functionality will be provided on an if and when available basis. © 2020 WatchGuard Technologies, Inc. All rights reserved. WatchGuard, the WatchGuard logo, Fireware, Firebox and Dimension are trademarks or registered trademarks of WatchGuard Technologies, Inc. in the United States and/or other countries. All other trademarks are the property of their respective owners. Part No. WGCE67418_101220