


Synergy 21 LED Flex Strip 280 WW DC24V 19,2W/m IP20 CRI>90 2835 *Project*



kwh/1000h:	132,00
Lumens:	10560
Watt:	120,0
Nominal Service Life:	35000 Std.
Switching Cycles:	50000
Opt. Ambient Temperature.:	25 °C

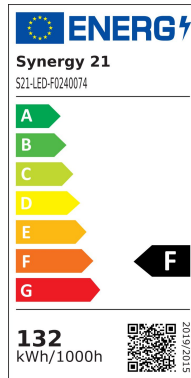

Project article with 30m,

Synergy 21 LED Flex Strip 2835 Series

Voltage: 24V,
Watt: 19.2W/m, 120W±10%
Light colour: warm white, 3000K, CRI>90
Brightness: 2208lm/m ±10%,
Beam angle: 120°
Protection class: IP20
Number of LEDs: 280*2385SMD/m
Dimensions: 30000*10*3 mm
PCB colour: white, open cable end red black (150±5mm)
Operating temperature: -25°C to +40°C
Can be shortened every 7 LEDs 2.7cm
Adhesive tape: yes 3M on the back

Strip can be shortened at the cut marks with sharp scissors.
!Attention! Strip must first be checked for functionality.
Only split the strip when no current is present.

Our 3M adhesive tape adheres well, but should only be used as a mounting aid.
There are a variety of mounting options, such as clips, permanently elastic mounting adhesive, cable ties, etc.

Please note that LED strips must also be cooled.

Make sure that the LED strip does not exceed a working temperature of 40°C, otherwise its service life cannot be guaranteed.

No guarantee can be given for overheated LED strips.

Attributes

Attribute	Value
Abstrahlwinkel:	120
Dimmbar:	Ja
LED Strip Länge:	5
Lichtfarbe:	warmweiss
Lichtfarbe in Kelvin:	3000
Schutzklasse:	IP20
Weight:	0.85 Kg
Warranty:	24.00 Months