

BPS192V7ART3U/BPS192V9ART3U  
BPS240V7ART3U/BPS240V9ART3U

### EXTENDED BATTERY MODULE TO PROLONG RUNTIME

#### The battery module ensures extended system runtime during power outages


Designed for data center and critical applications, the Extended Battery Module (EBM) Series can be used in conjunction with compatible UPS systems to provide prolonged system runtime during power interruption. The battery modules come with DC plug-and-play power connectors to allow for adding multiple EBMs. The sealed lead-acid batteries used within the EBMs are stable and safe, which ensure the power system's reliable performance.

#### SERIES FEATURES

- Rack/Tower Convertible Configurations
- Sealed Lead-acid Batteries
- EBM Expansion Capability
- Metal Housing

#### PRODUCT CALLOUTS

1. EBM Detection Connector
2. DC Breaker
3. Battery Output
4. Battery Input

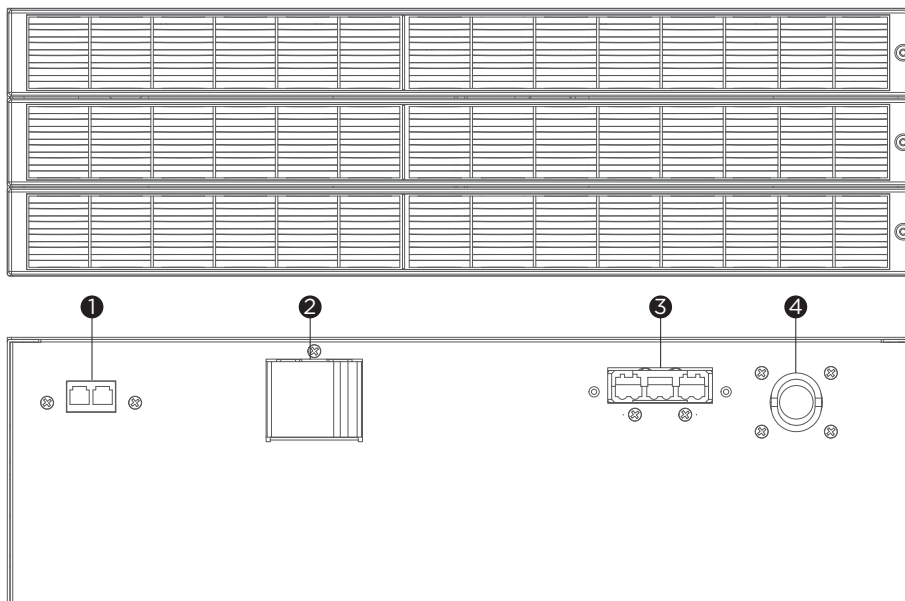

BPS192V7ART3U/BPS192V9ART3U/BPS240V7ART3U/BPS240V9ART3U



## TECHNICAL SPECIFICATIONS

Model Name	BPS192V7ART3U	BPS192V9ART3U	BPS240V7ART3U	BPS240V9ART3U
<b>General</b>				
Nominal Output Voltage (Vdc)	192		240	
Rated Output Current (A)	75			
<b>Battery</b>				
Battery Type	Sealed Lead-acid			
Built-in Charger	No			
Typical Recharge Time (Hours)	4			
User-replaceable	Qualified Personnel Only			
Expansion Ready	Yes			
Replacement Battery Pack Quantity (pcs)	2			
Compatible UPS	OLS6KERT4U	OLS10KERT4U	OLS6KERT5U	OLS10KERT5U, OLS6KERT5UM, OLS8KERT5UM, OLS10KERT5UM
<b>Physical</b>				
Form Factor	Rackmount, Tower			
<b>Physical Size</b>				
Dimensions (WxHxD) (mm.)	433 x 127.8 x 660	433 x 127.8 x 670	433 x 127.8 x 660	433 x 127.8 x 660
Weight (kg.)	47	55		66
Installed Rack Height (U)	3			
<b>Environmental</b>				
Operating Temperature (°C)	0 - 40			
Operating Relative Humidity (Non-condensing) (%)	0 - 90			
<b>Certifications</b>				
Certifications*	CE			
RoHS	Yes			

\*Certifications may vary according to different regions. Visit [www.cyberpower.com](http://www.cyberpower.com) for more information.  
#All specifications are subject to change without notice.

