

AX3000 Dual-Band Wi-Fi AP/Extender ZXHN H3601P


Overview

ZXHN H3601P is an advanced home gateway that supports 3000Mbps Dual-band concurrent 11ax Wi-Fi, supporting 160MHz@5GHz. It provides High Speed Internet and IPTV through the GE uplink.

ZXHN H3601P complies with the EasyMesh standard to provide whole home Wi-Fi coverage. With its ultra-high Wi-Fi speed and optimized QoS, this device brings you the ultimate Wi-Fi experience.



Highlights

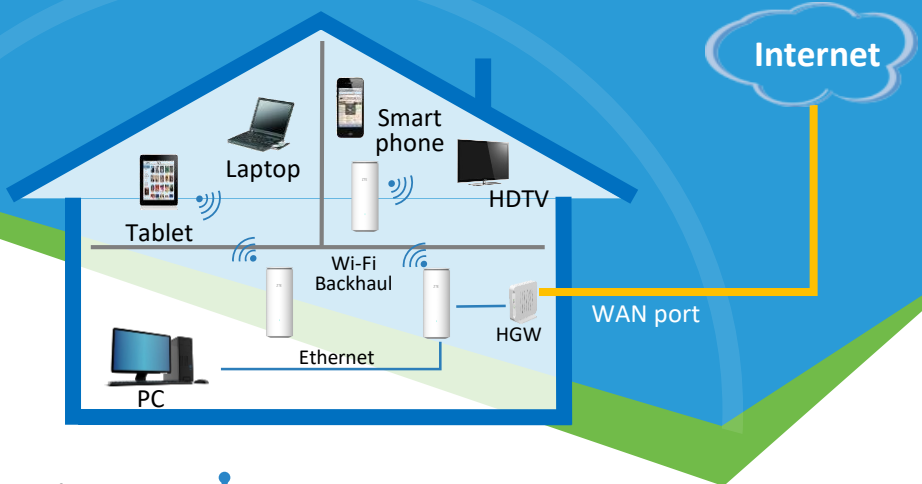

Whole Home Wi-Fi Coverage

- Standardized EasyMesh multi-AP network
- Self-healing improves network robustness



Ultimate Wi-Fi Experience

- MU-MIMO and OFDMA bring better concurrency and higher bandwidth
- Dual band concurrent Wi-Fi 6 up to 3000Mbps
- Band steering and smart roaming optimize QoS



Stylish IC Design

- Sleek styling blends perfectly with the home
- Internal antennas design is more in line with fashion trends




More Flexible Management

- Robust remote management via TR-069 protocol

Hardware Specifications

Interfaces	WAN	•1xGE RJ-45 port
	LAN	•2xGE RJ-45 ports •2x2 802.11b/g/n/ax @2.4GHz •2x2 802.11a/n/ac/ax 160MHz@5GHz
Buttons	• WPS • Reset	
LED	• Status (red, green and blue)	
Antennas	• Internal antennas	

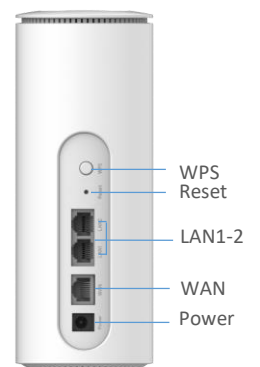



AX3000 Dual-Band Wi-Fi AP/Extender ZXHN H3601P

Software Functions

Wi-Fi

- Manual/auto radio channel selection
- Transmit power adjustable
- Beamforming for the 5GHz band
- Open system/shared key authentication
- WPA/WPA2/WPA3 security
- 2x2 802.11a/n/ac/ax 160MHz@5GHz

Multiple APs

- EasyMesh compliance
- Star and daisy-chain networking
- Auto configuration, Plug & Play
- Band steering
- Smart roaming
- Self-healing backhaul

Networking

- IPv4/IPv6 dual-stack
- Port mapping/DMZ
- UPnP IGD with NAT traversal capability
- Static routing/dynamic routing
- Dynamic DNS relay
- DHCP client/server
- IGMP and MLD snooping/proxy

QoS

- Flexible packet classification
- 802.1p and DSCP remarking
- Up to eight queues
- SP/DWRR/SP+DWRR
- Priority based queue scheduling
- Wi-Fi Multimedia (WMM)

Security

- Stateful Packet Inspection (SPI) firewall
- Denial of Service (DoS) protection
- Multi-VPN pass-through (L2TP/PPTP/IPSec)
- IP/URL filtering
- Service based access control

Management

- TR-069 remote management
- Web GUI based management
- Local built-in diagnostic function
- Logs and statistics
- Remote upgrade via HTTPS

Other Characteristics

Power Supply	<ul style="list-style-type: none"> • 12 V DC, 1.0 A
Physical	<ul style="list-style-type: none"> • Net weight: 500 g (not include attachment and power adapter) • Dimensions (W x H x D): 184*125*70 mm
Environmental	<ul style="list-style-type: none"> • Operating temperature: 0 °C - 40 °C • Humidity: 5% - 95% (non-condensing)
Certification	<ul style="list-style-type: none"> • CE certification • Wi-Fi 6 certification • EasyMesh certification