

**ATEN**  
Simply Better Connections

Home | Partner Center | Contact us | Site Map

Select Language

Corporate | Solutions | **Products** | News | Support | Download

# Products

Product Browser

Key Words Search :  go | Model Search : VS291

- + Enterprise Solutions
- + SMB Solutions
- + SOHO Solutions
- + Embedded Solutions
- + Accessories
- + **Video Products**
  - Presentation System
  - [Video Switches](#)
  - Video Splitters
  - Video Matrix Switches
  - DVI Video Switches
  - DVI Video Splitters
  - HDTV A/V Switches
  - HDMI Switches
  - Video Extenders

## VS291

Products Supporting Windows Vista ...

KVM Wizard

Online Test

IP-based KVM Control Unit- KN9116

**Download :** [Manual](#) [Driver](#) [QSG](#) [Firmware](#)

**2-Port Video Switch**

→ The VS291 is a video switch with 2 ports. It allows 2 independent computers to display their video outputs on a single monitor. Therefore, users will not need to buy monitors for each computer additionally.

Video Converter

+ USB & Firewire

+ Data Communication

+ KVM Cables



**Patent NO. :** TW 152473 (Taiwan) ,US 6,119,148 (USA) ,CN ZL 98218061.6 (China) ,DE 29814640.1 (German)


## Features

- Displays the video output of two computers on a single monitor or projector.
- Computer selection via pushbutton switch.
- Electronic switching for greater reliability and durability.
- Easy Installation - No Software Required.
- Long distance transmission - up to 10m
- High resolution video - up to 1920 x 1440.
- DDC, DDC2, DDC2B Compatible.
- Supports VGA, XGA, SVGA, UXGA and Multisync monitors.
- OS Support: Windows 2000, Windows XP, Linux, Mac and Sun

## Package Content

- 1x 2-Port Video Switch
- 1x Power Adapter

## Diagram

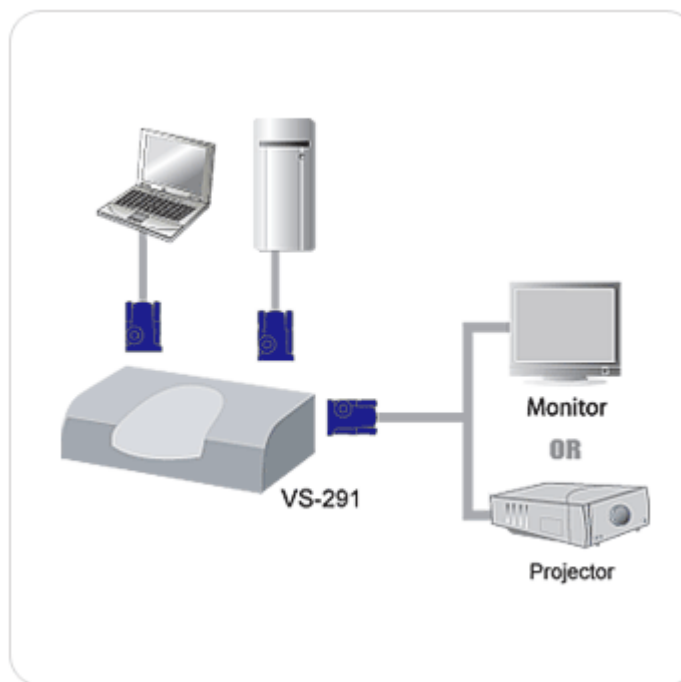

+ [View enlargement](#)

## Specification



<b>Computer Connections</b>		2
<b>Port Selection</b>		Pushbutton
<b>Connectors</b>	Video In	2 x HDB-15 Female (Blue)
	Video Out	1 x HDB-15 Female (Blue)
	Power	1 x DC Jack
<b>Switches</b>	Port	1 x Pushbutton
<b>LEDs</b>	Selected	2
<b>Video</b>		1920 x 1440 @ 60Hz
<b>Signal Range</b>		Up to 10m (33')

<b>Power Consumption</b>		DC9V, 0.9W (Max.)
<b>Environment</b>	Operating Temp.	0-50°C
	Storage Temp.	-20-60°C
	Humidity	0-80% RH, Non-condensing
<b>Physical Properties</b>	Housing	Plastic/Metal
	Weight	0.15 kg
	Dimensions ( L x W x H )	12.00 x 6.50 x 4.40 cm

- \* The specification and pictures are subject to change without notice.
- \* All trademarks and logos are the properties of their respective holders.

 [Top](#)

ATEN.com is published by ATEN International Co. Ltd., Taiwan. All rights reserved.