

NOTES:

Performance:
Meets Cat.3 EIA/TIA 568A Standard.

Electrical Specifications:


Insulation Resistance:500M ohms(min.)
Contact Resistance:20m ohms (max.)
Current Rating: 1.5Amps.
Withstanding Voltage:1000VAC RMS@60Hz/1min.

Mechanical Specifications:

IDC Punch Down Cycle: Over 25 Cycles(min.)
RJ-45 Jack Insertion Cycle: Over 200 Cycles(min.)

Accessory:

- 1.Cable Tie (75x2.4mm)x25PCS
 - 2.Instruction Sheet
 - 3.Screw and Nut M6*17mm x 4set
 - 4.Silica gel 3.5G x 1PCS
- Color: Black RAL 9005
PACKING: 1pcs /PE BAG + INNER CARTON

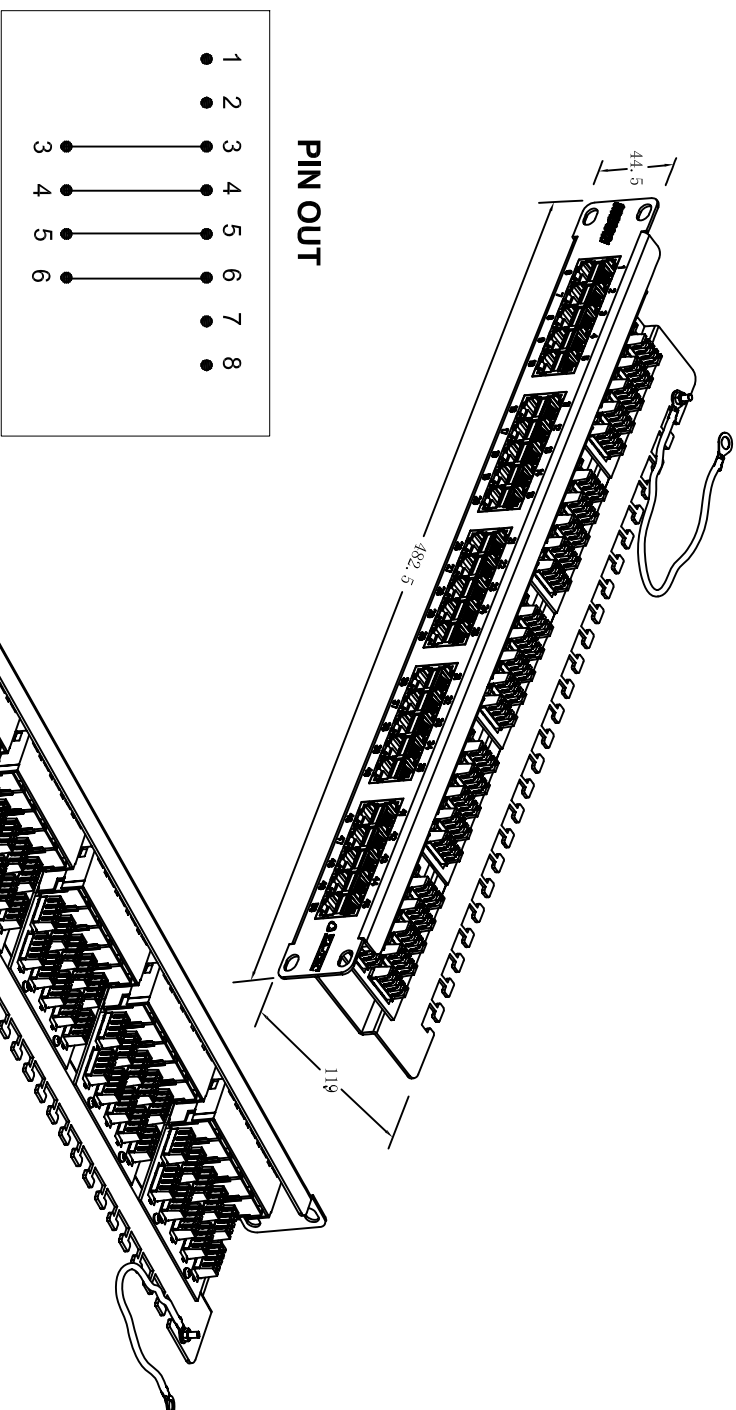

MATERIAL LIST:

⑥	Bottom Panel:	1.5mm thickness Metallic Panel (SECC) BLACK RAL9005	1	
⑤	RJ-45 Jack:	Housing-PBT/UTP RJ 45-Jacks UL-94V0	50	
④	PCB	FR-4/1.6mm UL-94V0	5	
③	IDC Body	Fireproof PC/ABS UL-94V0	50	
②	IDC Pin	Bronze & Tinned	200	
①	IDC Terminal	For 22-26 AWG Cable	200	
NO.	PARTS NAME	SPECIFICATION STANDARD	QTY	REMARK


SYNERGY 21

CUSTOMER	ITEM NO.:	S215204
PRODUCT NAME	CAT. 3 PATCH PANEL 50port	manufacture country:
DRAWNBY	CHECKBY	APPROBY
DATE	REV.	DATE
2010-10-27	A	2010-10-27
SYNERGY 21	SYNERGY 21	SYNERGY 21


BY CHK

REVISION RECORD MODIFICATIONS

NEW

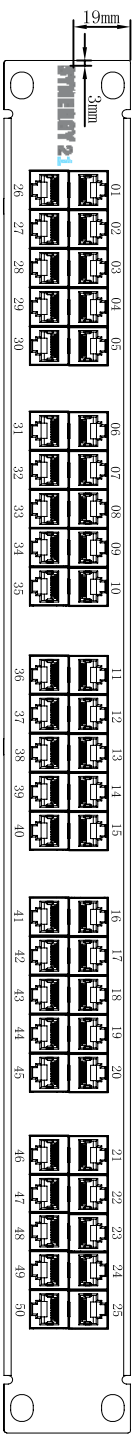

PATCH PANEL COLOR : BLACK

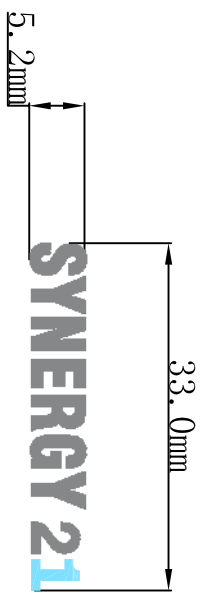

"SYNERGY 2" for silver printing The pantone of Color is 877C

"1" for blue printing The pantone of Color is 298C

SYNERGY21

CUSTOMER		ITEM NO.		S215204	
PRODUCT NAME	CAT. 3 PATCH PANEL 50port	manufacture country:	CHINA	UNIT	MM
DRAWNBY	CHECKBY	APPOBY	DATE		
NEW					
2010-03-05					
A					
SYNERGY21	SYNERGY21	SYNERGY21	SYNERGY21	SYNERGY21	2010-03-05
REVISION RECORD MODIFICATIONS	DATE	REV.			
CHK					
BY					