


- NOTE:
1. USB Type C male input, DP male output
 2. 100% MAC BOOK + Monitor test
 - (1). Resolution: 3840×2160@120Hz
 3. RoHS (EU2015/863) and REACH Compliant
 4. Packing: Single Pack: 1PC/flag label (WEEE)/SYNERGY 21 A bag+label; SubPack: 10pcs/PE bag+label; Carton +labelx2;
 - Operating temperature: 0~45°C
 - Storage temperature: -20~+70°C
 - Operation humidity: 10%~85%
 - Storage humidity: 10%~85%

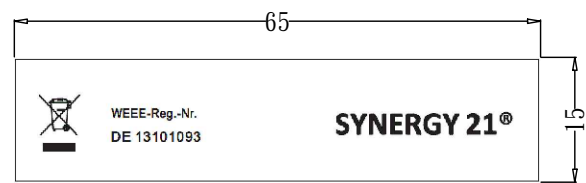

MATERIAL LIST:

NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK
⑤	HOUSING	Aluminium Housing cool grey 11C, Aluminum shell beveled highlighting	2	
④	INNER MOLD	LD-PE	2	
③	DP FEMALE	DP/MALE, BLACK INSULATION, , THE PIN GOLD PLATED , THE SHELL FOR GOLD PLATED+PCB	1	
②	USB C TYPE	USB C /M Solder Type, Black PBT Insulation, The Pin Gold Plating, the shell for GOLD Plating	1	
①	CABLE	USB3.2 CABLE[(32AWG TC)*1P+D(32AWG TC) +AL+MY]*4C+(32AWG TC)*1P+(32AWG TC)*4C+(26AWG TC)*2C+AB PVC/BLCAK JACKER:black Cotton braid OD:5.0±0.2MM	1	

ITEM NO.	LENGTH
S215442V2	1800±40MM

SYNERGY 21					
CUSTOMER			ITEM NO.	SEE THE CHART	
PRODUCT NAME	USB 3.2 Type C Male to DP 1.4V male	manufacture country:	CHINA	UNIT	MM
DRAWNBY	SYNERGY 21	CHECKBY	SYNERGY 21	APPOBY	SYNERGY 21
DATE	2021-08-26	REV.	A0	DATE	2021-08-26

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		NEW	2021-08-26	A0