



Select Language ▾



Product Browser

Key Words Search :

go Model Search :

+ Enterprise Solutions ▾

+ SMB Solutions ▾

+ SOHO Solutions ▾

Cable KVM Switches
Desktop KVM Switches

+ Embedded Solutions ▾

+ Accessories ▾

+ Video Products ▾

+ USB & Firewire ▾

+ Data Communication ▾

+ KVM Cables ▾

CS1732A



+ Download : [Manual](#) [Driver](#) [QSG](#) [Firmware](#)

→ [360° View](#)

★ Awards

• 2-Port USB KVMP Switch

→ CS1732A 2 Port KVM Switch has built-in USB on each of the front and rear panels and audio signal connectors. It allows users to control the computer and peripheral devices via a signal console at ease.



Patent NO. : TW 203183 (Taiwan) ,US 6957287 (USA) ,TW I220489 (Taiwan) ,CN ZL 01260527.1 (China) ,TW 081926 (Taiwan) ,CN ZL 02301203.X (China) ,TW I220476 (Taiwan) ,DE 202004004227.4 (German) ,US 7047344 (USA) ,US 6464197 (USA)

| Features

- One USB console controls 2 computers and two additional USB

devices

- 2 port USB Hub built in
- Dual interface supports computers with PS/2 or USB keyboards and mice
- Multiplatform support: compatible with all operation platforms PC (Windows, Linux and most others), Mac and Sun
- With speaker and microphone support
- [Bi-directional switching and flexible interoperability; switch permits independent PC, independent peripheral, and independent audio function, regardless of KVM switch focus](#)
- Auto PS/2 and USB interface detection
- Buzzer On/Off via hotkey
- Keyboard and mouse emulation for error free booting
- Computer selection via front panel pushbuttons and hotkeys
- Superior video quality - up to 2048 x 1536; DDC2B
- Firmware upgradable
- OS Support: Windows 2000, Windows XP, [Windows Vista](#), LINUX, Mac, Sun and FreeBSD
- SUN/Mac keyboard support and emulation*
 - *1.PC keyboard combinations emulate SUN/Mac keyboards.
 - *2.SUN/Mac keyboards only work with their own computers



IP-
Ur


I Package Content



- 1x USB KVMP Switch
- 2x USB KVM Cables
- 1x Firmware Upgrade Cable
- 1x User Manual
- 1x Quick Start Guide

I Diagram



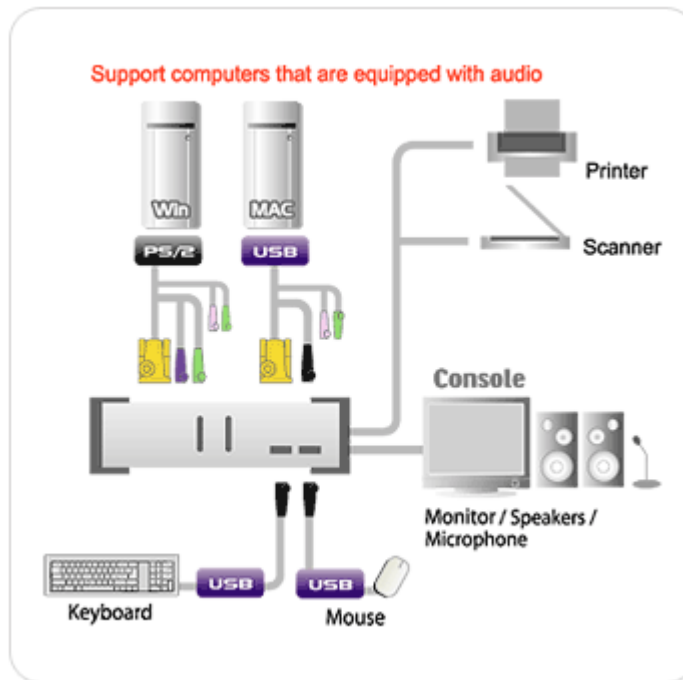

+ [View enlargement](#)

Specification



Computer Connections		2	
Port Selection		Hotkeys, Pushbutton	
USB Port/Audio Port Selection		Hotkey	
Connectors	Console Ports	Keyboard	1 x USB Type A Female (White)
		Video	1 x HDB-15 Female (Black)
		Mouse	1 x USB Type A Female (White)
		Speaker	1 x Mini Stereo Jack Female (Green)
		Microphone	1 x Mini Stereo Jack Female (Pink)
	KVM Ports	Keyboard/Video/Mouse	2 x SPHD-15 Female (Yellow)
		Speaker	2 x Mini Stereo Jack Female (Green)
		Microphone	2 x Mini Stereo Jack Female (Pink)
	USB Hub		2 x USB Type A Female (Black)
	F/W Upgrade		1 x RJ11 Female (Black)
Power		1 x DC Jack	
Switches	Port	2 x Pushbutton	
	F/W Upgrade	1 x Slide	
LEDs	On Line/ Selected	2 (Orange)	
	USB Link	2 (Green)	
Emulation	Keyboard/Mouse	USB	
Video		2048 x1536; DDC2B	
Scan Interval		1~99 seconds	

Power Consumption		DC5V, 1.2W
Environment	Operating Temp.	0~50°C
	Storage Temp.	-20~60°C
	Humidity	0~80% RH, Non-densing
Physical Properties	Housing	Metal
	Weight	0.49 kg
	Dimensions (LxWxH)	14.00 x 8.50 x 5.50 cm

- * The specification and pictures are subject to change without notice.
- * All trademarks and logos are the properties of their respective holders.

 [Top](#)

ATEN.com is published by ATEN International Co. Ltd., Taiwan. All rights reserved.