




REVISIONS			
REV	DATE	DESCRIPTION	APPRO. BY

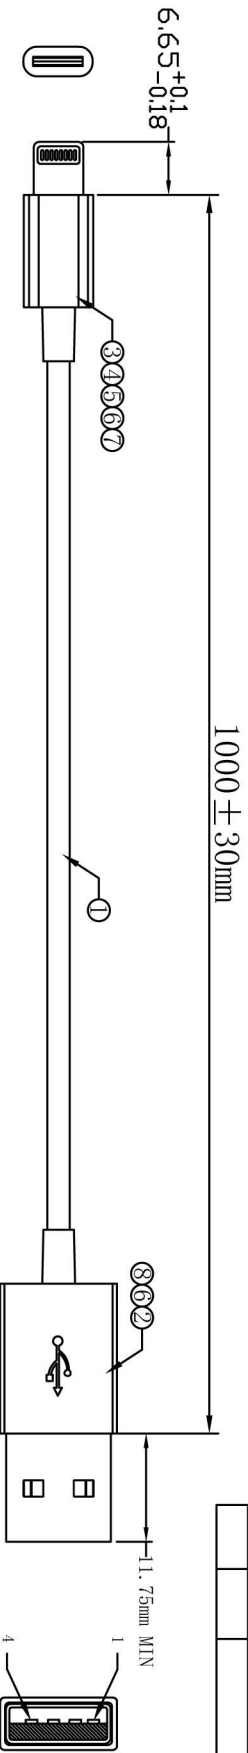

Assembly type

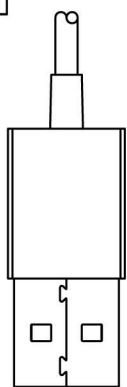


Assembly type

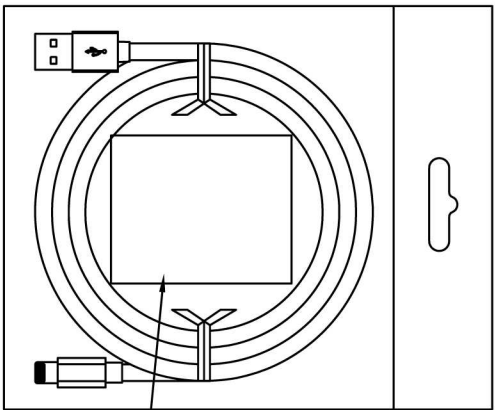


PACKING

SIZE: 200\*160\*0.08mm

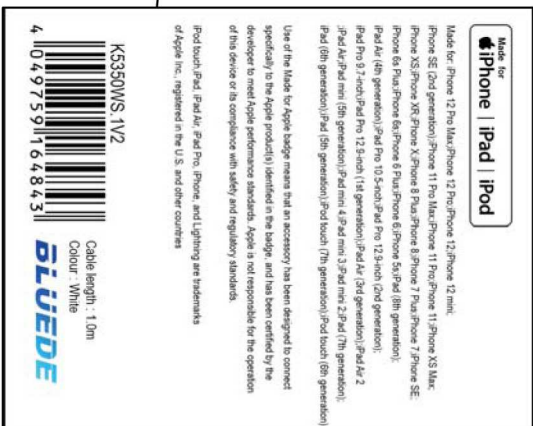

Label: 100\*80mm

PINOUT

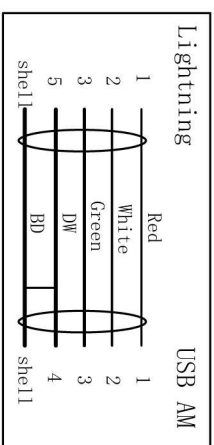

MATERIAL LIST:

NO.	PARTS NAME	SPECIFICATION DESCRIPTION	Q'TY	REMARK
①	USB AM Connector	Plastic ABS/ Color can choose	1	
②	Lightning Plastic	Lightning Plastic ABS/ Color can choose	1	
③	SR MOLDING	PVC 88A COLOR:WHITE	2	
④	INNER MOLDING	LDPE/NATURE IN COLOR	1	
⑤	Lightning Shell	Lightning C89 shell Ni Plated	1	
⑥	Lightning connector	Lightning C89 Welding type Pin Gold Insulation For white Shell Ni Plated	1	
⑦	USB AM Connector	USB A/M Welding type Pin Gold Flash Insulation For WHITE PBT Shell Ni Plated	1	
⑧	USB CABLE	USB2.0 30AWG (11/0.08TC*2C)+22AWG (65/0.08TC*1C)+(41/0.08TC)D+F+AB B=0.10mm/4*16 TC JACKET: PVC/WHITE OD:3.3±0.2mm	1	

NOTES:

- Electrical test:
  - Red wire to ground voltage (4.9~5.2V)
  - Green wire to ground voltage (2.5~2.9V)
  - White wire to ground voltage (1.7~2.2V)
  - Red wire current: 0.46mA MAX
  - I5 TEST : MUST BE PASS
- All parts are what is been Lead-free & Cadmium-free, welding wire with Lead-free accord with RoHS.

CUSTOMER'S ITEM	K5350WS.1V2	CUSTOMER	
DRAWING TITLE		Lightning to USB cable for iPhone - 1 meter	
UNIT	mm	SCALE	1:1
DRAMN BY	CHECK BY	APPRO BY	DATE
Zhouqinghua			2021/02/23

