


Synergy 21 LED Flex Strip kaltweiß DC24V 48W IP68



kwh/1000h:	52,80
Lumen:	3900
Watt:	48,0
Nennlebensdauer:	35000 Std.
Schaltzyklen:	50000
Opt. Umgebungstemp.:	25 °C

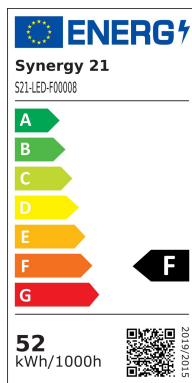

LED Flex Strip kaltweiß,
DC24V, max. 2A, 48W,
600Leds, 120°, 3528SMD
Länge: 5000*10,8*4mm, (Streifenbreite 10,8mm, Endkappenbreite 12mm)
Lumen: 3900
Kelvin: 6500K ±250
Schutzklasse: IP68, outdoor incl 3M tape
Bis zu -25°C geeignet!

Strip an Markierungsmarken mit scharfer Schere kürzbar.
!Achtung! Strip muss zuvor auf Funktionalität überprüft werden.
Strip nur teilen wenn kein Strom anliegt.

Energieeffizienzklasse: A+
kWh/1000h: 52,8



Bitte beachten sie, dass auch LED Streifen gekühlt werden müssen.
Achten sie darauf, dass der LED Strip die Arbeitstemperatur von 40°C nicht überschreitet, da sonst die Lebensdauer nicht gewährleistet werden kann.

Merkmale

Merkmal	Wert
Abstrahlwinkel:	120
Ampere:	2
CC oder CV:	CV
CRI:	>80
Dimmbar:	abhängig vom Netzteil
EPREL_ANTI_GLARE_SHIELD:	false
EPREL_BEAM_ANGLE:	Not applicable
EPREL_BEAM_ANGLE_CORRESPONDENCE:	SPHERE_360
EPREL_CAP_TYPE:	/
EPREL_CHROMATICITY_COORD_X:	0.322
EPREL_CHROMATICITY_COORD_Y:	0.342
EPREL_CLAIM_EQUIVALENT_POWER:	false
EPREL_COLOUR_RENDERING_INDEX:	92.4
EPREL_COLOUR_TUNEABLE_LIGHT_SOURCE:	false
EPREL_CONNECTED_LIGHT_SOURCE:	false
EPREL_CORRELATED_COLOUR_TEMP_TYPE:	RANGE
EPREL_DIMENSION_DEPTH:	500
EPREL_DIMENSION_HEIGHT:	5
EPREL_DIMENSION_WIDTH:	11
EPREL_DIMMABLE:	NO
EPREL_DIRECTIONAL:	NDLS
EPREL_ENERGY_CLASS:	F
EPREL_ENERGY_CONS_ON_MODE:	4
EPREL_ENVELOPE:	NO
EPREL_EQUIVALENT_POWER:	Not applicable
EPREL_HIGH_LUMINANCE_LIGHT_SOURCE:	false
EPREL_LIGHTING_TECHNOLOGY:	LED
EPREL_LUMEN_MAINTENANCE_FACTOR:	0.98
EPREL_LUMINOUS_FLUX:	469
EPREL_MAINS:	NMLS
EPREL_MAX_BEAM_ANGLE:	Not applicable

Merkmal	Wert
EPREL_MAX_COLOUR_RENDERING_INDEX:	95
EPREL_MIN_BEAM_ANGLE:	Not applicable
EPREL_MIN_COLOUR_RENDERING_INDEX:	92
EPREL_POWER_ON_MODE:	5.8
EPREL_POWER_STANDBY:	0.00
EPREL_R9_COLOUR_RENDERING_INDEX:	69.58
EPREL_REGISTRANT_NATURE:	MANUFACTURER
EPREL_SURVIVAL_FACTOR:	1.00
LED Strip Klebeband:	ja
LED Strip Breite:	10.80
LED Strip Höhe:	4
LED Strip Klebeband:	ja
LED Strip kürzbar:	50
LED Strip Länge:	5000
Lichtfabe in Kelvin:	6500
Lichtfarbe:	kaltweiß
Lichtfarbe in Kelvin:	6500
Lichtfarbe Name:	kaltweiß
Lumen:	3900
Schutzklasse:	IP68
Volt:	24
Gewicht:	0.346 Kg

Weitere Bilder

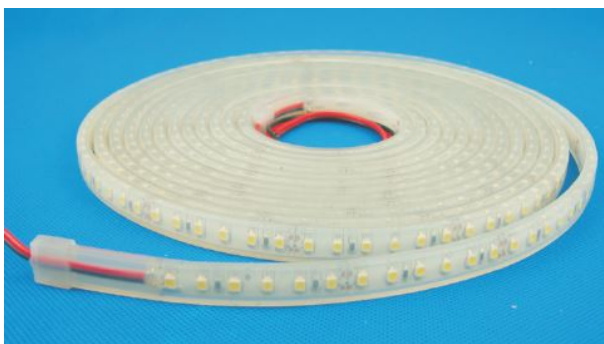



Zubehör

Art.-Nr.	Name
81069	Synergy 21 LED zub Hohlbuchse mit Schraubklemmen
81068	Synergy 21 LED zub Hohlstecker mit Schraubklemmen
81741	Synergy 21 LED Flex Strip zub. Silikonbefestigungsschelle 10er Pack
93680	Synergy 21 Netzteil - 24V 80W Mean Well dimmbar IP65
93682	Synergy 21 Netzteil - 24V 150W Mean Well dimmbar IP65
174654	Synergy 21 LED FLEX Strip zub. Easy Connect I shape for 1 line clear
174653	Synergy 21 LED FLEX Strip zub. Easy Connect I shape for 1 line red
174656	Synergy 21 LED FLEX Strip zub. Easy Connect I shape for 2 line clear
174655	Synergy 21 LED FLEX Strip zub. Easy Connect I shape for 2 line red
174637	Synergy 21 LED FLEX Strip zub. Easy Connect Strip to strip Joint 10/12mm IP67
174633	Synergy 21 LED FLEX Strip zub. Easy Connect Strip to Wire 10/12mm IP67
174645	Synergy 21 LED FLEX Strip zub. Easy Connect Used to add connector to a non-stripped wire