

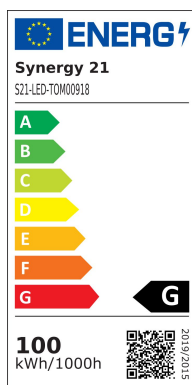


Synergy 21 LED Spot Outdoor floodlight 100W ww

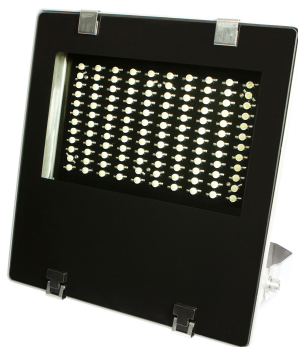

| | |
|----------------------------|------------|
| kwh/1000h: | 100,00 |
| Lumens: | 10000 |
| Watt: | 1337,0 |
| Nominal Service Life: | 35000 Std. |
| Switching Cycles: | 50000 |
| Opt. Ambient Temperature.: | 25 °C |



With emergency power function and overheating protection
 Operating voltage: > AC 207-253V/50-60Hz
 LED: 100Watt high-power chips
 Beam angle: 120°
 Lumen: 10000lm
 Warm white: 3000K ±150
 CRI: Ra>80
 dimmable: yes (leading edge phase dimmer)
 Housing: light grey with stainless steel mounting bracket
 Front glass: toughened safety glass (ESG)
 Operating temperature: -25°C to +55°C
 Protection class: IP65 (water jet-proof)
 Weight: 7kg
 Dimensions: (l*w*h) 365*340*90mm

Energy efficiency class: A+
 kWh/1000h: 100

Attributes

| Attribute | Value |
|-----------------|-------|
| Abstrahlwinkel: | 120 |

| Attribute | Value |
|------------------------|-----------------|
| Betriebstemperatur: | -25°C bis +55°C |
| CRI: | >80 |
| Dimmbar: | ja |
| Grösse: | 365*340*90 |
| LED - Gehäusefarbe: | grau |
| LED - Gehäusematerial: | Metall |
| Lichtfarbe: | warmweiss |
| Lichtfarbe in Kelvin: | 3000 |
| Lumen: | 10000 |
| Schutzklasse: | IP65 |
| Volt: | 230 |
| Weight: | 7 Kg |
| Warranty: | 24.00 Months |

Accessories

| Part No. | Name |
|----------|---|
| 148726 | Synergy 21 - Waterproof connector 1:1 |
| 148727 | Synergy 21 - Waterproof connector 1:2 |
| 148730 | Synergy 21 - Waterproof connector box 3 ports |
| 148729 | Synergy 21 - Waterproof connector box 3 ports transparent |
| 148728 | Synergy 21 - Waterproof connector box 4 ports |
| 134568 | Finder motion detector IP55 |
| 113414 | Finder motion detector IP54 |
| 82434 | Finder Twilight Switch suitable for Synergy 21 LED outdoor spotlight |
| 147265 | Netzkabel 230V Schutzkontakt CEE7(Stecker)->Open End mit Adernendhülsen, 1,8m,Black |