


Synergy 21 LED recessed ceiling spotlight Helios black, round, neutral white



kwh/1000h:	5,50
Lumens:	398
Watt:	5,0
Nominal Service Life:	35000 Std.
Switching Cycles:	50000
Opt. Ambient Temperature.:	25 °C

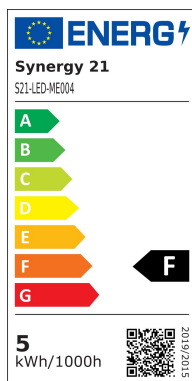

5 watt recessed ceiling spotlight
Lamp body and cooler made of aluminium
Stainless steel spring clip
Surface-mounted housing for concrete ceilings or similar, see accessories

Housing colour: black
Watt: 5Watt (CREE LED)
Light colour: 4000K, CRI>90
Luminous flux: 398 lm
Beam angle: 36°
Power supply: Constant current with 200mA and 22-26 Vdc (see accessories for power supply unit)
Head diameter: 68 mm
Total height: 16 mm
Hole size: 54-58mm
Dimmable: Yes via special power supply unit, see accessories

Energy efficiency class: F
kWh/1000h: 5.5

Attributes

Attribute	Value
-----------	-------

Abstrahlwinkel:	36
Ampere:	0.20
CC oder CV:	CC
CRI:	>90
Dimmbar:	abhängig vom Netzteil
Grösse:	68*16
LED - Gehäusefarbe:	schwarz
LED - Gehäusematerial:	Aluminium
Lichtfarbe:	neutralweiß
Lichtfarbe in Kelvin:	4000
Lumen:	398
Schutzklasse:	IP20
Volt:	22-26
Weight:	0.2 Kg
Warranty:	60.00 Months

Accessories

Part No.	Name
182379	Synergy 21 LED Deckeneinbauspots Helios schwarz, rund, Aufputzrahmen
182414	Synergy 21 LED recessed ceiling spot Helios power supply unit
178464	Synergy 21 Netzteil - CC Driver 200mA, 30~42V Osram Element S
232625	Synergy 21 LED Deckeneinbauspots Helios Netzteil DALI DIM SELF
234200	Synergy 21 Netzteil - CC Driver 200mA, 24~42V Osram Element G3
233581	Synergy 21 Netzteil - CC Driver 200mA, 24~42V Osram Element G4
167892	Synergy 21 Netzteil - CC Driver 200~1050mA, 35~115V Osram dali NFC
232389	Synergy 21 LED Deckeneinbauspots Helios Netzteil TRIAC dimmbar