

ALLNET IP Kamera Fix Dome / Outdoor / 5MP / IR / Vandalismus / Low-Light / Motorisiertes Vario-Objektiv / 93° / "ALL-CAM2495v3-LVEFN"

>>> [Zum Shop-Artikel](#)



EAN CODE




Highlights:

- **Optik**
 - 1/2,7", Lichtquelle: Lighthunter
 - Smart IR, bis zu 50m (164 ft) IR Entfernung
 - Bis zu 120 dB optischer WDR (Wide Dynamic Range)
- **Komprimierung**
 - Ultra 265, H.265, H.264, MJPEG
 - Dreifach-Streams
 - 2592*1944@20fps im Hauptstrom
 - ROI (Region von Interesse)
- **Netzwerk**
 - ONVIF-Konformität
- **Aufbau**
 - DC12V oder PoE-Stromversorgung
 - Großer Spannungsbereich von $\pm 25\%$ in DC
 - Micro SD, bis zu 256 GB
 - Alarm 1 Eingang und 1 Ausgang, Audio 1 Eingang und 1 Ausgang
 - IP67 Schutz gegen Eindringen
 - IK10 vandalismusgeschützt

Key Features



Dimensions

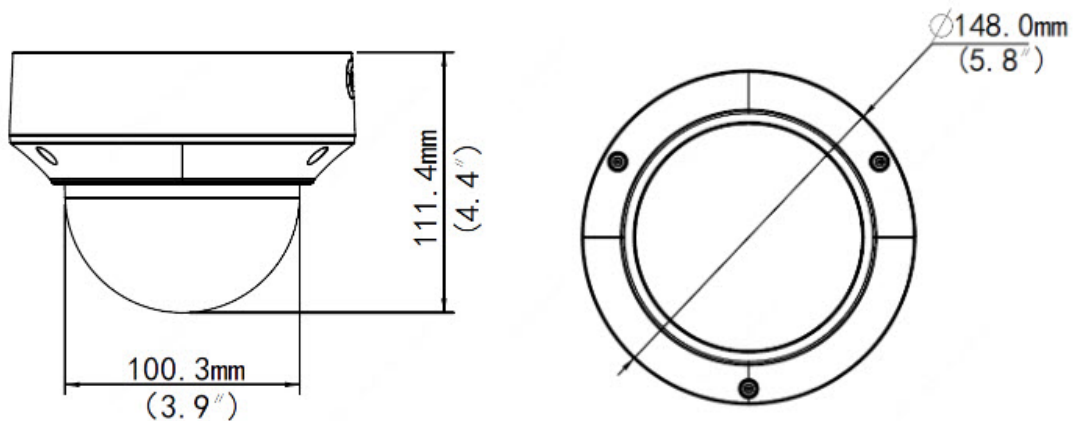

Links zu direkten Streams siehe

=
<https://service.allnet.de/index.php?/Knowledgebase/Article/View/347/0/ipcamera--link-fr-den-direkten-stream---all-cam24xx>

Technical Details:

ALL-CAM2495v3-LVEFN					
Camera					
Sensor	1/2.7", 5.0 megapixel, progressive scan, CMOS				
Lens	2.7~13.5mm@F1.2, AF automatic focusing and motorized zoom lens				
Iris	Auto aperture				
DORI Distance	Lens (mm)	Detect (m)	Observe (m)	Recognize (m)	Identify (m)
	2.7	70.9(232.5ft)	28.4(93.0ft)	14.2(46.5ft)	7.1(23.3ft)



Art.-Nr.: 209791
Herst.-Nr.: ALL-CAM2495v3-LVEFN

	13.5	247.5(812.0ft)	99.0(324.8ft)	49.5(162.4ft)	24.8(81.2ft)
Angle of View (H)	26.8°~93.1°				
Angle of View (V)	20.7°~66.0°				
Angle of View (O)	31.6°~121.0°				
Shutter	Auto/Manual, 1 ~ 1/100000s				
Adjustment angle	Pan: 0°~355°		Tilt: 0°~80°		Rotate: 0°~355°
Min. Illumination	Colour:0.002ux (F1.2, AGC ON) 0 lux with IR				
WDR	120dB				
Day/Night	IR-cut filter with auto switch (ICR)				
IR Range	Up to 50m (164 ft) IR range				
Wavelength	850nm				
IR On/Off Control	Auto/Manual				
Defog	Digital Defog				
Video					
Video Compression	Ultra 265, H.265, H.264, MJPEG				
Frame Rate	Main Stream: 5MP(2592*1944),Max 20fps; 4MP(2560*1440),Max 30fps; Sub Stream: 2MP (1920*1080), Max 30fps; Third Stream: D1 (720*576), Max 30fps				
Video Bit Rate	128 Kbps~16 Mbps				
ROI	Supported				
Video stream	Triple streams				
OSD	Up to 8 OSDs				
Privacy Mask	Up to 8 areas(8 blacks/8 mosaics)				
Image					
White Balance	Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2				
Digital noise reduction	2D/3D DNR				
Smart IR	Support				



Flip	Normal/Flip Vertical/Flip Horizontal/180°/90°Clockwise/90°Anti-clockwise
HLC	Support
BLC	Support
Events	
General Function	Watermark, IP Address Filtering, Alarm input, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication
Audio	
Audio Compression	G.711U, G.711A
Two-way Audio	Supported
Suppression	Supported
Sampling Rate	8KHZ
Storage	
Edge Storage	Micro SD, up to 256 GB
Network Storage	ANR,NAS(NFS)
Network	
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, RTMP
Compatible Integration	ONVIF (Profile S, Profile G, Profile T), API
Client	EZStation EZLive Ezview
Web Browser	Plug-in required live view: IE9+, Chrome 41 and below, Firefox 52 and below
Interface	
Audio I/O	Audio cable
	1 Input: impedance 35k?; amplitude 2V [p-p]
	1 output: impedance 600?; amplitude 2V [p-p]
Alarm I/O	1/1
Network	1 * RJ45 10M/100M Base-TX Ethernet
Certification	
Certifications	CE: EN 60950-1 UL: UL 60950-1 FCC: FCC Part 15

General	
Power	DC12V(±25%), PoE(IEEE 802.3af)
	Power consumption: Max 8W
	Support overcurrent protection, Input short circuit protection
Dimensions (Ø x H)	148.0 x 111.4mm (5.8" x 4.4")
Weight	0.93kg(2.05lb)
Working Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: 95% RH (non-condensing)
Storage Environment	-40°C ~ 70°C (-40°F ~ 158°F), Humidity: 95% RH (non-condensing)
Surge protection	6KV
Vandal Resistant	IK10
Ingress Protection	IP67

Zubehör

Art.-Nr.	Name
159713	ALLNET IP Kamera zbh. Montagebox MiniDome für ALL-CAM2495-LVEFN
159714	ALLNET IP Kamera zbh. Ceilingmount/Deckeneinbauset für ALL-CAM2495-LVEFN
159711	ALLNET IP Kamera zbh. Wallmount with Junctionbox/Wandmontag for ALL-CAM2495-LVEFN
99305	ALLNET TP Cat 6 Überspannungs-/Blitzschutz Surge Protector ALL95100 Indoor
186548	ALLNET PoE Injektor Gigabit PoE & PoE+ (15,4W/30W) / Kunststoffgehäuse / "ALL0488v6"
112270	ALLNET PoE Injektor Gigabit / PoE & PoE+ & PoE & LT PoE (15,4W/30W/60W/90W) / Metallgehäuse / "ALL048900v2"
99315	ALLNET Switch unmanaged 8 Port Gigabit 63W / 4x PoE+ / 4x LAN / Lüfterlos /19" / "ALL8804PoE+"
93392	ALLNET Switch unmanaged 8 Port Gigabit 150W / 8x PoE+ / Lüfterlos / 19" / "ALL8808POE"
193997	ALLNET Switch full managed 8 Port Gigabit 130W / 8x PoE+ / 2x SFP / Lüfterlos / 19" / "ALL-SG8610PM"
193997	ALLNET Switch full managed 8 Port Gigabit 130W / 8x PoE+ / 2x SFP / Lüfterlos / 19" / "ALL-SG8610PM"
194025	ALLNET Switch full managed 24 Port Gigabit 390W / 24x PoE+ / 4x SFP / Lüfterlos / 19" / "ALL-SG8626PM"



Art.-Nr.: 209791
Herst.-Nr.: ALL-CAM2495v3-LVEFN

Art.-Nr.	Name
200625	ALLNET Videoserver NVR Box mit Networkoptix Server, RK3399, 2GB, ALL2288
124355	Networkoptix IP Nx-Professional Videomanagement Software 1 Kanal "X86 Platform"
162926	Networkoptix IP Nx-Professional Videomanagement Software 4 Kanal "X86-Platform"
162927	Networkoptix IP Nx-Professional Videomanagement Software 8 Kanal "x86 Platform"
146999	ALLNET PoE USV Backup - USV für Kameras, Accesspoints ALL90011PoE

Klicken Sie hier um weitere Artikel aus dieser Kategorie in unserem Shop zu entdecken.