


Artikelnummer: H02010A0083


Modul-Aufnahme 50x50 aufbauend, 2-fach, UP/50 BR unbestückt, für Unterputz-Anwendungen



Technische Attribute	
Kurzbezeichnung	Modul-Aufnahme 50x50, aufbauend
Ausführung	2-fach UP/50 inkl. Modulträger, Beschriftungsfenster und Shutter, unbestückt
Anmerkungen	für Unterputz und Hohlwand Geräte-Dosen nach DIN 49073, 30° Auslass
Serie	AMJ-S; AMJ Modul K; AMJ Kupplung K; UMJ Modul K; UMJ Kupplung K
Farbe	alpinweiß

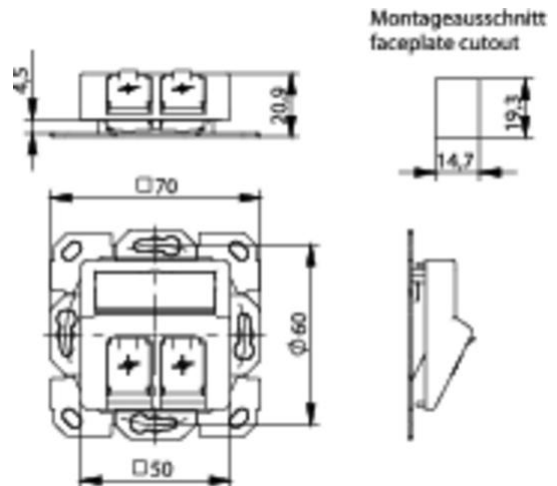

Produkt-Beschreibung



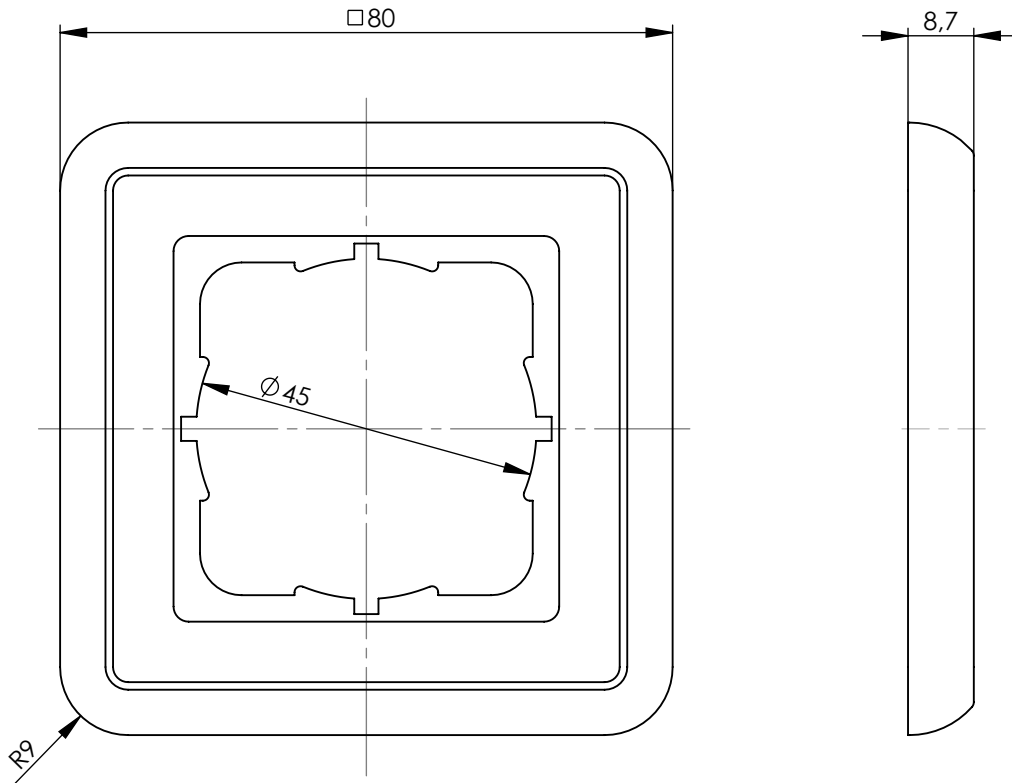
Für den flexiblen Einsatz bietet Telegärtner ein breites Sortiment an verschiedensten Applikationen, in denen die AMJ- und UMJ-Module und Kupplungen montiert werden können. Hierzu werden keine zusätzlichen Adapter benötigt.



Bestell-Nr. Order no	Bezeichnung Description	Farbe Colour	Barcode EAN 13	VPE PU
B00004A0021	1-fach Abdeckrahmen 80x80 single cover frame 80x80	alpinweiß alpine white	4018359255060	5

Bestell-Nr. Order no	Verpackung Packing	VPE PU	Karton Carton	UPE OPU	Karton Carton	UPE OPU	Karton Outer carton
B00004A0021	5 pcs in carton	5 pcs in carton	81x81x43 [mm]	-	-	-	-

Änd./ rev. index	Änderungs-Nr. / revision code	Datum / date	Name / name	Datum / date	Name / name	Gewicht / weight [g]
				13.07.2015	BU	
				23.07.2015	AS	ca./approx.
			Maßstab / scale	Benennung / title		
			1:1	Cover frame single Abdeckrahmen 1-fach		
			unt. Maße/ dim. without tolerances according to	Untert./ doc. type	Zeichnungsnr./ drawing no.	
				D	B00004A0021	 Maße/ dimensions: mm
				Ersatz für/ replaces	B00004A0019	Original : DIN A4
						Blatt/ sheet 1 von/ of 1

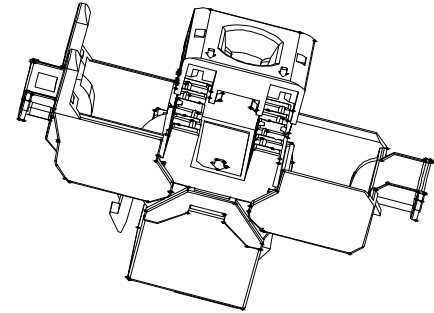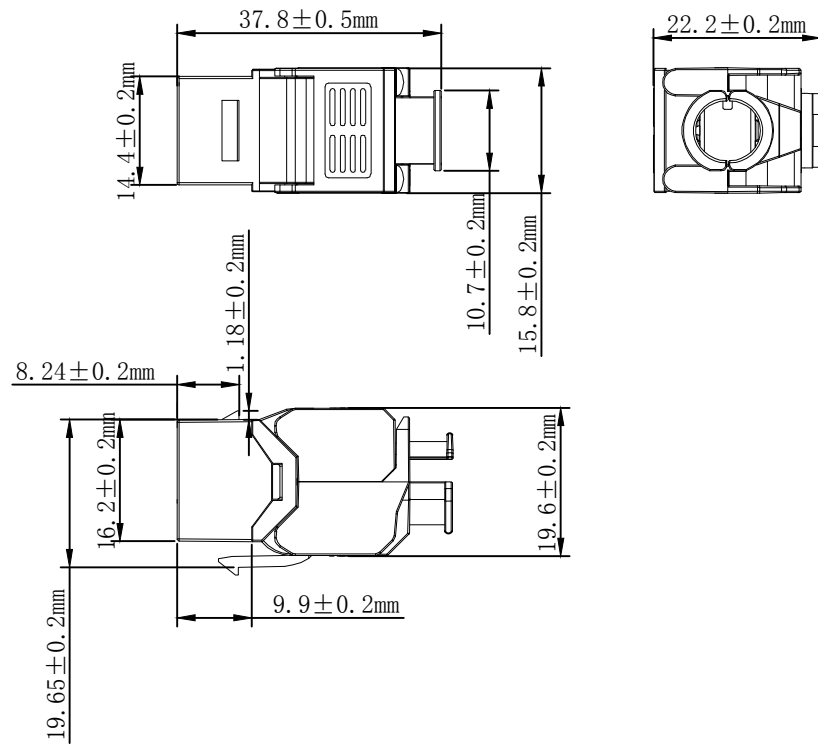

NOTES:

ELECTRICAL:

1. Contact Resistance : 20MΩ MAX
2. Insulation Resistance : 500MΩ MIN @ 500V DC
3. Withstand Voltage : DC 1000V AC 700V RMS 60Hz, 1MIN
4. Compliance with Class I up to 2000 MHz to ISO/IEC 11801-1:2017 (Ed. 1. 0)

ENVIRONMENTAL:

1. Storage Temperature : -40°C ~ +70°C
2. Operation Temperature : -10°C ~ +60°C

MECHANICAL

1. MATERIAL: Zinc alloy
2. IDC MATERIAL: PC TERMINAL: PHOSPHOR BRONZE, TIN PLATING
3. RJ45 Contact Life: 750 Times Min
4. Plug inforce: <30N
5. Solid cable: 1/22AWG (0.65MM) - 1/26AWG (0.4MM) ID: 1.1MM - 1.6MM
6. Stranded cable: 22/7-26/7AWG ID: 1.1MM - 1.6MM
7. Cable OD: 5.0mm - 8.5mm
8. PoE per IEEE 802.3af, PoE+ per IEEE 802.3at, PoE++ per IEEE 802.3bt
RoHS 2.0 and REACH Compliant
9. with copper foil in packing.

MATERIAL LIST:


⑦	Housing	Zinc alloy Silver	1	
⑥	RJ 45 JACK INSERT	PHOSPHOR BRONZE 8P8C GOLD PLATED	8	
⑤	PCB	FR-4 1.6mm	1	
④	IDC BODY	White PC	1	
③	IDC PIN	PHOSPHOR BRONZE & TINNED	8	
②	LABEL COLOR CODE	T568A/B	2	
①	IDC TERMINAL	FOR 22-26AWG CABLE	1	

NO	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
		NEW	2020-09-01	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.


SYNERGY 21							
CUSTOMER	ALLNET Computersysteme GmbH	ITEM NO.	S216378				
PRODUCT NAME	CAT 8.1 STP KEYSTONE JACK	manufacture country:	china	UNIT	MM		
DRAWNBY	CHECKBY	APPOBY	DATE				
SYNERGY 21	SYNERGY 21	SYNERGY 21	2020-09-01				

Installationsanleitung/Installation guide


Keystone Jack

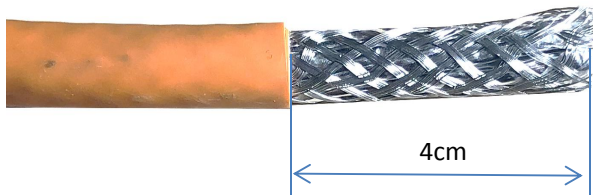


①.Stripping 4cm of sheath.

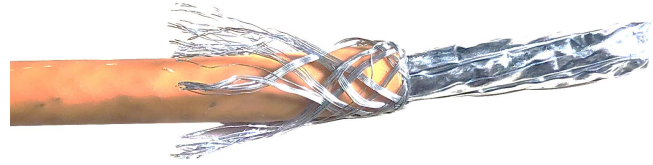


②.foldback braided and drained wire.

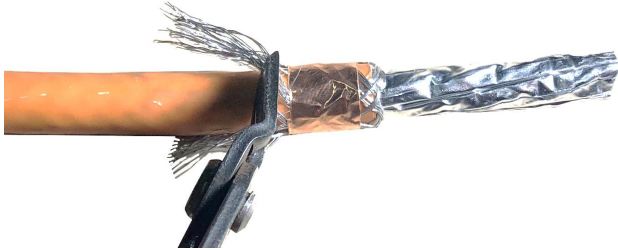


③.paste copper foil on the braided and ground wire and cut off the excess weave and the ground wire

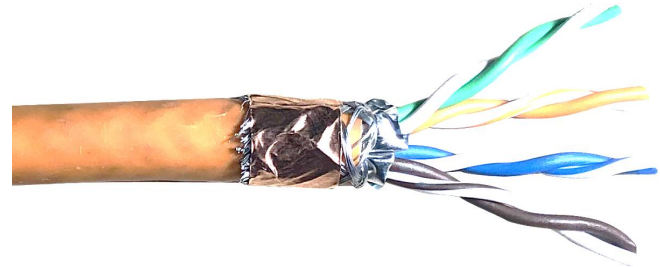

④.4.Fan out all four twisted pairs, allocate each by following colorcoding label

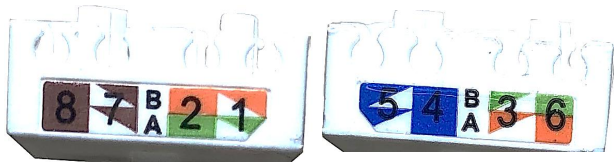


⑤.Across the holde by the color marks of T568A or T568B

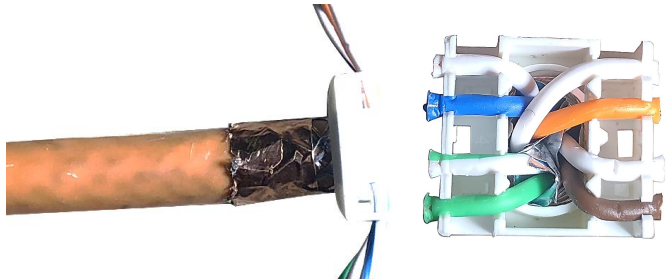


⑥. allocate each conductor into proper slots on wiring cap by following color coding




⑦.Trim the theends of conductors.

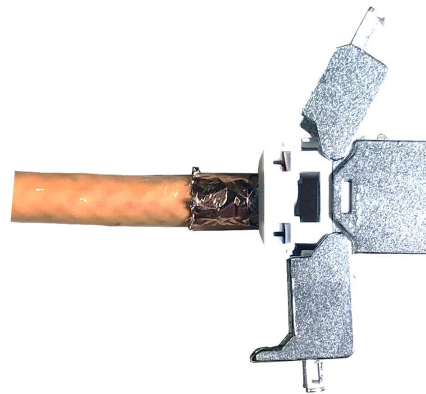

⑧.install the termination cap in direction of arrow into the keystone jack

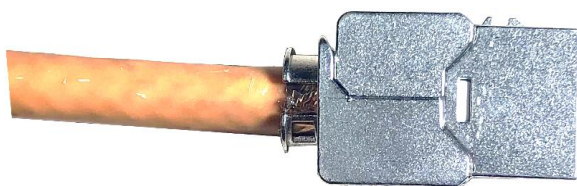

⑨.press both covers of the keystone jack to contact the cable

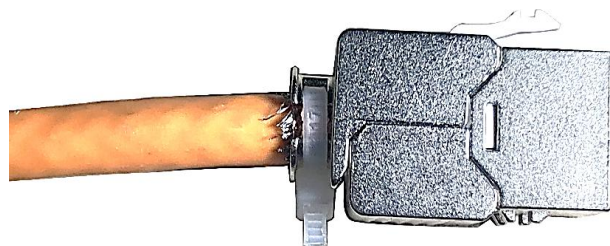

⑩.use cable tie for strain relief and to fix the shielding clamp