


REVISIONS		
REV	DATE	DESCRIPTION
		APPRO. BY

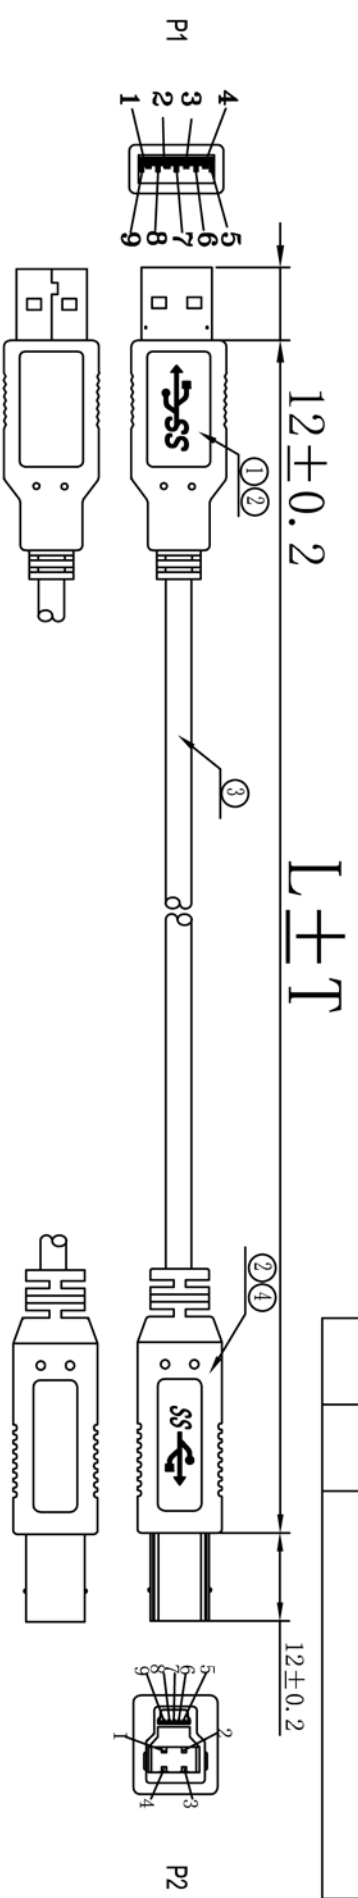

PIN OUT

P1	P2
1 RED	1
2 WHITE	2
3 GREEN	3
4 BLACK	4
5 YELLOW	5
6 BLUE	6
7 DRAIN	7
8 DRAIN	8
9 ORANGE	9
SHELL	SHELL
9 PURPLE	9
8 BRAID	8
7 SHELL	7
6 SHELL	6
5 SHELL	5
4 SHELL	4
3 SHELL	3
2 SHELL	2
1 SHELL	1

ITEM NO.	LENGTH
K5236.1, 8	1800 ± 18mm
K5236.3	3000 ± 30mm
K5236.5	5000 ± 50mm

NOTE 1:

4	CONNECTOR	USB3.0 B/M TYPE, The Pin Gold Plating, The Shell Nickel Plating, BLUE Insulator	1 Set
3	CABLE	USB 3.0 28AWG (7/0.127TC*1P+E+W/M)*2+7/0.127TC*1P+7/0.127TC*2C+AB B-M-MG-E-7/0.127TC Jacket:PVC/BLACK OD: 5.3 ± 0.2mm	1
2	OVERMOLD	PVC COLOR:BLACK	20g
1	CONNECTOR	USB 3.0 A/M TYPE, The Pin Gold Plating, The Shell Nickel Plating, BLUE Insulator	1 Set
NO.	MAT. NAME	DESCRIPTION	Q' TY

NOTE:

1. PRINTING: AWM 80°C 30V VW-1 USB3.0 Super Speed Cable
2. RoHS compliant.
3. Operating Temperature: -15°C-80°C

CUSTOMER'S ITEM	K5236.X	CUSTOMER	
DRAWING		TITLE	USB CABLE
UNIT	mm	SCALE	1:1
DRAWN BY	LIUJINGJING	CHECK BY	
APPRO BY		DATE	2011.10.31

