

BPSE72V40ART2U-B

EXTENDED BATTERY MODULE TO PROLONG RUNTIME

The battery module ensures extended system runtime during power outages


Designed for data center and critical applications, the Extended Battery Module (EBM) Series can be used in conjunction with compatible UPS systems to provide prolonged system runtime during power interruption. The battery modules come with DC plug-and-play power connectors to allow for adding multiple EBMs. The sealed lead-acid batteries used within the EBMs are stable and safe, which ensure the power system's reliable performance.

SERIES FEATURES

- Rack/Tower Convertible Configurations
- Sealed Lead-acid Batteries
- User-replaceable Batteries
- EBM Expansion Capability
- Metal Housing

PRODUCT CALLOUTS

- 1 . On-board Replaceable Fuse Cover
- 2 . Automatic Detection of Extended Battery Module Connector
- 3 . Input Connector
- 4 . Output Connector

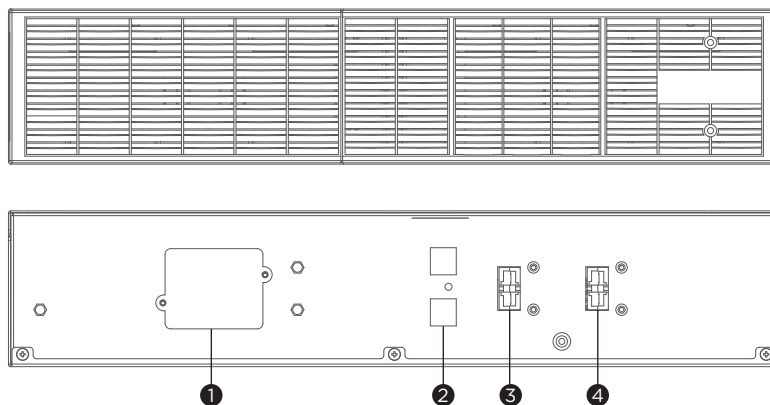

BPSE72V40ART2U-B



TECHNICAL SPECIFICATIONS

Model Name	BPSE72V40ART2U-B		
General			
Nominal Output Voltage (Vdc)	72		
Rated Output Current (A)	40		
Battery			
Battery Type	Sealed Lead-acid		
Built-in Charger	No		
Typical Recharge Time (Hours)	Depends on Connected UPS		
User-replaceable	Yes		
Expansion Ready	Yes		
Replacement Battery Pack	RBP0158		
Replacement Battery Pack Quantity (pcs)	2		
Compatible UPS	OLS2200ERT2UA-B, OLS3000ERT2UA, OLS3000ERT2UA-B, OLS3000ERT2UA-N, OLS3000ERT2UA-S		
Physical			
Form Factor	Rackmount, Tower		
Physical Size			
Dimensions (WxHxD) (mm.)	438 x 88 x 610		
Weight (kg.)	38.75		
Installed Rack Height (U)	2		
Environmental			
Operating Temperature (°C)	0 - 40		
Operating Relative Humidity (Non-condensing) (%)	0 - 90		
Certifications			
Certifications*	CE		
RoHS	Yes		

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
#All specifications are subject to change without notice.

