


Synergy 21 LED dekoline flex strip 36 RGB USB complete set



kwh/1000h:	3,00
Lumens:	275
Watt:	3,0
Nominal Service Life:	35000 Std.
Switching Cycles:	50000
Opt. Ambient Temperature.:	25 °C

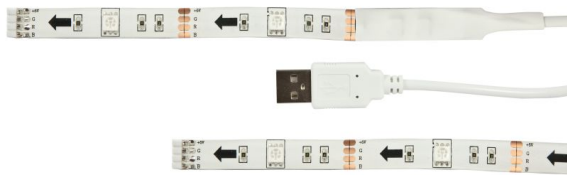

Retail complete set 2m RGB Strip incl. USB connection, controller and IR remote control in attractive and environmentally friendly sales packaging.

LED Flex Strip RGB
Protection class: IP65
Polarity: common positive pole
Operating requirements: USB DC5V, max. 0.6A, 3W,
Beam angle: 120°
LED type: 5050SMD
Chipset: Epistar Taiwan
red: 12*12mm with 4Lm,
green: 10*15mm with 6Lm
blue: 12*12mm with 2,5lm
Number of LEDs: 36Leds
Lumen: 0-275 Lm
Length: 2000 mm (4 x 50cm)
Width: 10 mm
Height: 3 mm
Can be shortened: Can be shortened after each LED (5.5 cm)

Controller: integrated in the LED strip
The IR remote control has 16 different colour buttons and 4 light programmes
DIMMABLE

Energy efficiency class: B

kWh/1000h: 3

Adhesive tape for mounting aid on the back.

Please note that LED strips must also be cooled.

Make sure that the LED strip does not exceed the operating temperature of 40°C, otherwise the service life cannot be guaranteed.

Attributes

Attribute	Value
Abstrahlwinkel:	120
CC oder CV:	CV
Dimmbar:	ja
LED Strip Klebeband:	ja
LED Strip Breite:	10
LED Strip Höhe:	3
LED Strip kürzbar:	55
LED Strip Länge:	2000
Lichtfabe in Kelvin:	RGB
Lichtfarbe:	RGB
Lichtfarbe in Kelvin:	RGB
Lichtfarbe Name:	RGB
Schutzklasse:	IP65
Volt:	5
Weight:	0.3 Kg
Warranty:	36.00 Months

Additional Images



Accessories

Part No.	Name
26955	Netz Kabel 230V Euro-Stecker/Euro8(C7)-Buchse, 1,8m, Black,
81069	Synergy 21 LED zub Hollow Socket with Screw Terminals
81068	Synergy 21 LED zub wooden plug with screw terminals
81741	Synergy 21 LED Flex Strip add. Silicone mounting clip 10 pack
83858	Add Synergy 21 LED Flex Strip. System socket Series A 4soldering pins 4sockets
93219	Synergy 21 LED Flex Strip add. 78112 Dual connection cable

Part No.	Name
80831	Synergy 21 LED Flex Strip add. RGB Booster DC12/24V (amplifier) -