


## Synergy 21 LED light backlight panel 620\*620 with standard power supply 30W Flicker Free



kwh/1000h:	38,50
Lumens:	4200
Watt:	35,0
Nominal Service Life:	35000 Std.
Switching Cycles:	50000
Opt. Ambient Temperature.:	25 °C

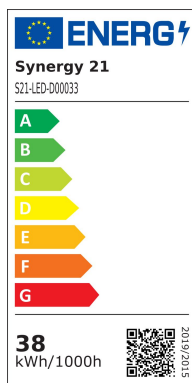


Standard power supply unit (BOKE) for 35W backlight panel 178119 or similar.  
Flicker free  
Input: 220-240VAC  
Output: 700mA, 30-42V  
Temperature: -20~+50°C  
Non dimmable

## Attributes

Attribute	Value
Abstrahlwinkel:	120
Ampere:	0.70
CRI:	80
Dimmbar:	Nein
Grösse:	620*620
Lichtfarbe:	neutralweiss
Lichtfarbe in Kelvin:	4000
Lumen:	4200

Attribute	Value
Weight:	0.6 Kg
Warranty:	60.00 Months

## Additional Images

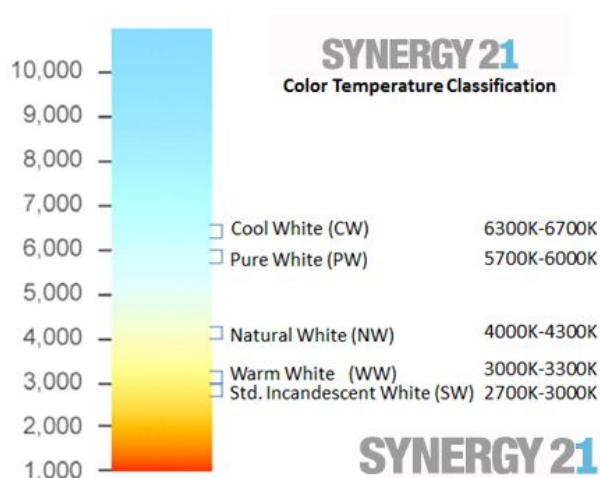

## Accessories

Part No.	Name
188176	Synergy 21 LED light panel 620*620 with standard power supply 35W PRO V4 0-10V DIM
149090	Synergy 21 LED light panel 620*620 with standard power supply 35W PRO V3 Triac DIM
149092	Synergy 21 LED light panel 620*620 with standard power supply 35W PRO V3 DALI DIM
149515	Synergy 21 LED light panel add mounting kit clip for V3 PRO Panel
126765	Synergy 21 LED light panel add mounting kit pendant set II
92793	Synergy 21 LED light panel add mounting kit pendant set round
92795	Synergy 21 LED light panel add mounting kit S-angle for V1+V2 panel
90892	Synergy 21 LED light panel add mounting kit cylinder for V1+V2 panel silver
79113	Synergy 21 LED light panel zub. Power Supply Connector
149378	Mean Well power supply - CC Driver 700mA 34~57V Triac dimm
146798	Synergy 21 Netzteil - CC Driver 300~700mA, 15~50V Osram

Part No.	Name
104642	Synergy 21 Power supply - CC Driver 500~1400mA ~60W Mean Well dali dimm
119170	Synergy 21 Power supply - CC Driver 500~1400mA ~60W Mean Well 0-10V dimm
133947	ALLNET MSR ALL4460 / 0-10V DIMM actuator with ON/OFF for LED
134571	ALLNET ALL3419 / IP Building-Autom. 3x I2C, 1x USB, LAN/WLAN
134899	Synergy 21 Netzteil - Einschaltstrombegrenzer OSRAM
147265	Netzkabel 230V Schutzkontakt CEE7(Stecker)->Open End mit Adernendhülsen, 1,8m,Black