


12±0.2

L±1


5.6±0.2

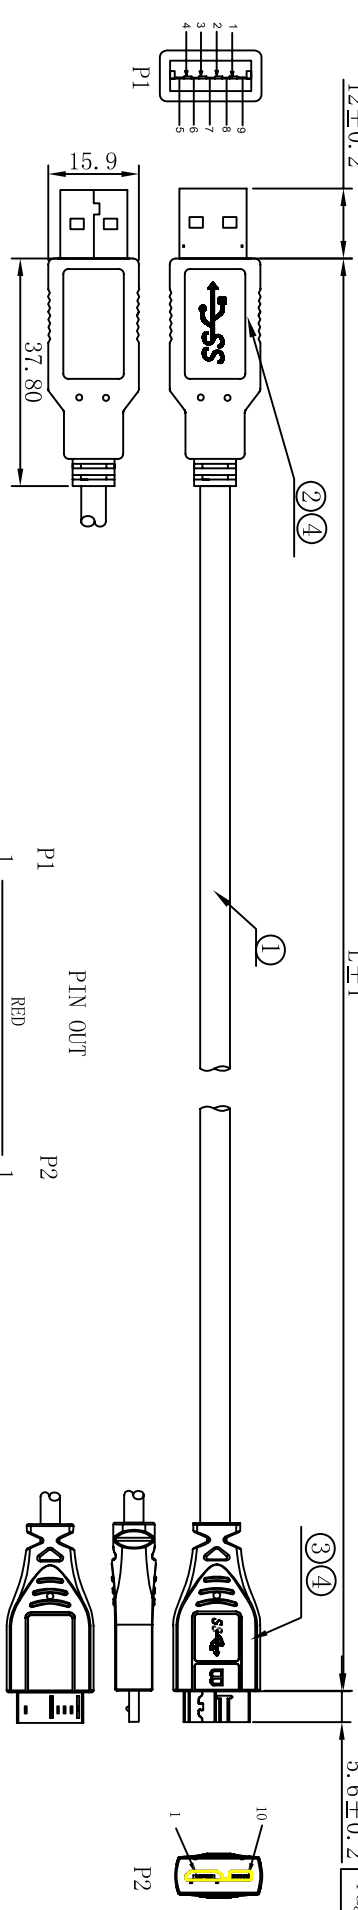


ITEM	LENGTH	EAN CODE	PACKING
S215310	1000±30MM	4038816224668	SYNERGY 21 A Bag
S215311	2000±50MM	4038816224675	SYNERGY 21 A Bag
S215312	3000±70MM	4038816224682	SYNERGY 21 A Bag

NOTE:
1. Electrical test:
(1). 100% open short & miss wire test;
(2). Insulation resistance:DC 300V 10MΩ;
(3). Contactor resistance:3Ω Max;
(4). Dielectric strength:150V AC/Minute, 1mA.

2. RoHS compliant
3. PRINTING:AWM 80°C 30V VW-1 USB 3. 0 SUPER SPEED CABLE
4. PACKING:SYNERGY 21 PE BAG+LABEL
MATERIAL LIST:

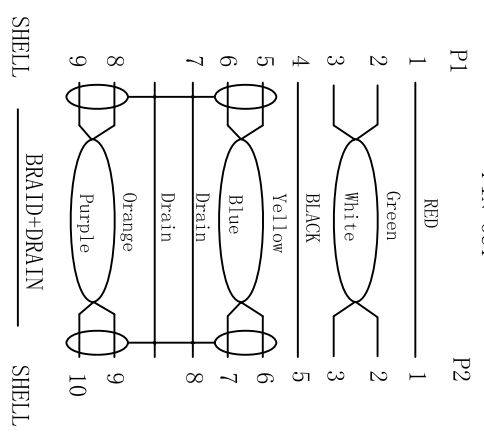

⑦	PE BAG	SYNERGY 21	SLIP PE BAG		
⑥	LABEL	NO DRY GLUE LABEL			
⑤	MINI TIE	Black			
④	OUTER MOLD	color For	BLACK	2	
③	USB B TYPE	USB3. 0 MICRO B/M 10PIN Solder Type, Black PBT Insulation, The Pin Gold Plating;		1	
②	USB A TYPE	USB3. 0 A/M 9PIN Solder Type, Blue PBT Insulation, The Pin Gold Plating;		1	
①	CABLE	USB3. 0(7/0. 12BC*1P+DRAIN/7. 0. 12BC+PAM)*2PCS+7/0. 12TC*2C+7/0. 12TC*1P+PILLER AL-FOIL+7/0. 12TC+128/0. 12AL-MG, JACKET:PVC/BLACK OD5. 0±0. 2MM		1	
NO.	PARTS NAME	SPECIFICATION STANDARD		QTY	REMARK

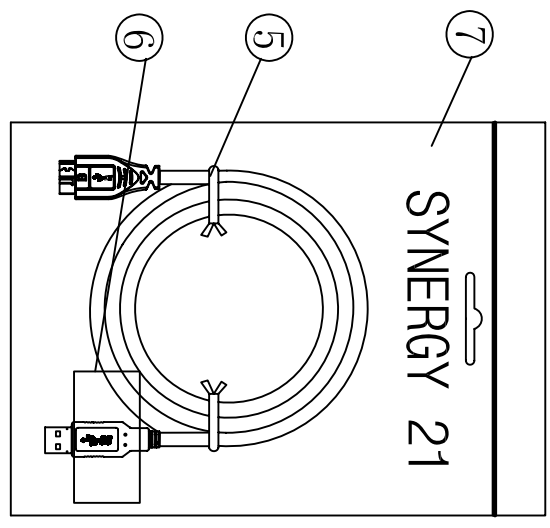

BY		CHK	REVISION RECORD MODIFICATIONS		DATE	REV.	SYNERGY 21					
				NEW	2010-12-28	A	CUSTOMER	REF.	ITEM NO.	See The Chart		
							PRODUCT NAME	USB 3. 0 AM/MICRO BM	manufacture country:	CHINA	UNIT	MM
							DRAWNBY	CHECKBY	APPROVE		DATE	
							SYNERGY 21	SYNERGY 21	SYNERGY 21		2010-12-28	