


Synergy 21 LED object/stadium HC spotlight 300W IP67 cw -V



| | |
|----------------------------|------------|
| kwh/1000h: | 300,00 |
| Lumens: | 42000 |
| Watt: | 300,0 |
| Nominal Service Life: | 35000 Std. |
| Switching Cycles: | 50000 |
| Opt. Ambient Temperature.: | 25 °C |

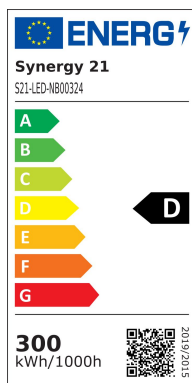

Operating voltage: AC 85-265V, 50/60Hz
LED: 3 modules of 168 LEDs, CREE 3030 140lm/Watt
Power supply unit: 1*MeanWell
Beam angle: 30°, module can be swivelled
Lumen: 3*14000lm = 42000lm
Efficiency: 140Lm/Watt
Light colour: 5700K ±150
CRI: Ra>70
Dimmable: no
Housing: Aluminium
Operating temperature: -40°C to +65°C
Protection class: IP67 / IK08
Dimensions: 208*92*768mm

Other beam angles on request: 10°/30°/60°/90°/120°
Other light colours on request: 4000K/5000K/5700K/6500/


Energy efficiency class: A++
kWh/1000h: 300

The connection of electrical components and systems may only be carried out by only be carried out by qualified specialists!

Attributes

| Attribute | Value |
|------------------------|--------------|
| Abstrahlwinkel: | 30 |
| CRI: | >80 |
| Dimmbar: | nein |
| Grösse: | 208*92*768 |
| LED - Gehäusefarbe: | schwarz |
| LED - Gehäusematerial: | Aluminium |
| Lichtfarbe: | kaltweiß |
| Lichtfarbe in Kelvin: | 5700 |
| Lumen: | 42000 |
| Schutzklasse: | IP67 |
| Volt: | 230 |
| Weight: | 11.6 Kg |
| Warranty: | 60.00 Months |

Additional Images

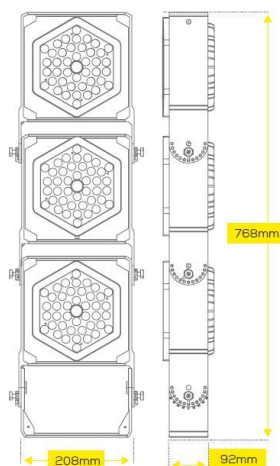

Accessories

| Part No. | Name |
|----------|---|
| 148726 | Synergy 21 - Waterproof connector 1:1 |
| 148727 | Synergy 21 - Waterproof connector 1:2 |
| 148730 | Synergy 21 - Waterproof connector box 3 ports |
| 148729 | Synergy 21 - Waterproof connector box 3 ports transparent |
| 148728 | Synergy 21 - Waterproof connector box 4 ports |
| 147265 | Netzkabel 230V Schutzkontakt CEE7(Stecker)->Open End mit Adernendhülsen, 1,8m,Black |