


Synergy 21 LED retrofit GX5,3 4x1W ww V2 dimmbar



SYNERGY 21

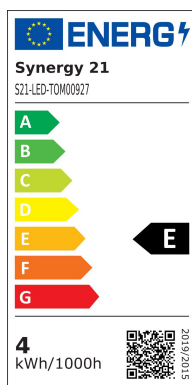

kwh/1000h:	4,00
Lumens:	440
Watt:	4,0
Nominal Service Life:	35000 Std.
Switching Cycles:	50000
Opt. Ambient Temperature.:	25 °C



Base: GX5.3
4x1Watt LEDs
Aluminium housing
Input: 12Vac / 12Vdc,
Input range: 8-14Vac / 8-18Vdc
Power consumption: 4 W
Lumen: 400 lm
Kelvin 3000±250
Beam angle 60°
Dimmable: yes
DxH: 50mm*60mm
Can be used as a replacement for conventional halogen mirror lamps.

Colour: Warm white

Caution:

Please only use regulated or switching power supply units with the Synergy 21 LED GX5.3/MR16 spots. Do NOT use halogen transformers or wound power supply units, otherwise there is a risk of the LED being destroyed by overvoltage.

Please be sure to measure the voltage beforehand.

We recommend using the Synergy 21 Digital Multimeter DM830 to measure the voltage.

Please note that Synergy21 LED retrofit lamps may only be operated at an operating temperature between 0-50 C°.

The service life of the LEDs cannot be guaranteed in the event of deviations!

Energy efficiency class: A++
kWh/1000h: 4

Attributes

Attribute	Value
Abstrahlwinkel:	60
CRI:	80
Dimmbar:	Ja
Lichtfarbe:	warmweiss
Lichtfarbe in Kelvin:	3000
Lumen:	400
Sockel:	GX5,3
Weight:	0.1 Kg
Warranty:	24.00 Months

Accessories

Part No.	Name
85498	Synergy 21 LED adapter / socket for LED lamps GX5.3 and G4
107727	HEP Power Supply - 12V 12W - HEP for Flush Mount Box