


Synergy 21 LED-Retrofit G4 3W Bullet ww

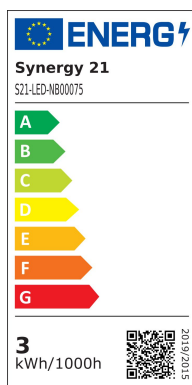

kwh/1000h: 3,00


Lumens: 200

Watt: 3,0

Nominal Service Life: 35000 Std.

Switching Cycles: 50000

Opt. Ambient Temperature.: 25 °C



4 0 3 8 8 1 6 0 2 3 8 5 8

- Pins below
- warm white 3000K \pm 250, 200Lm
- Beam angle: 360 °
- 12V AC/DC, 3W
- Dimensions: 50mm x 20mm
- Working temperature: 20 ~ 40 °C

Attention:

Please only use regulated or switching power supplies with the Synergy 21 LED GX5.3/MR16 spots. Do NOT use halogen transformers or wound power supplies, otherwise there is a risk of the LED being destroyed by overvoltage.

Please be sure to measure the voltage beforehand.

We recommend using the Synergy 21 DM830 digital multimeter to measure the voltage.

Please note that Synergy21 LED retrofit lamps may only be operated at an operating temperature between 0-50 C°.

In the event of deviations, the service life of the LEDs cannot be guaranteed!

Energy efficiency class: A+

kWh/1000h: 3

Attributes

Attribute	Value
Ampere:	0.25
Betriebstemperatur:	-20 bis +40
CC oder CV:	CV
CRI:	80
Dimmbar:	Nein
Grösse:	50*20
Lichtfarbe:	warmweiss
Lichtfarbe in Kelvin:	3000
Lumen:	200
Schutzklasse:	IP20
Sockel:	G4
Weight:	0.05 Kg
Warranty:	24.00 Months