


## Synergy 21 Tira LED Flex DC24V/99W, blanco neutro, 5m



kwh/1000h:	105,60
Lúmenes:	10250
Vatio:	96,0
Vida útil nominal:	35000 Std.
Ciclos de conmutación:	50000
Temperatura ambiente óptima:	25 °C

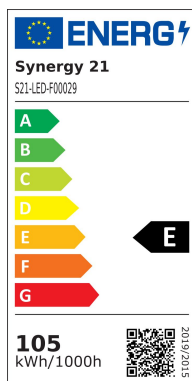

### Características técnicas:

- Alimentación: DC24V/4,13A/99W
- Temperatura termodinámica: 4200K
- Número de LED:300 SMD5630
- Flujo luminoso: 8500lm
- Ángulo de enfoque: 120°
- PCB Blanco
- Se puede cortar cada 3 LED (50mm)
- Interior
- Dimensiones: 5000 x 10 x 2 mm
- Incluye autoadhesivo 3M

### Atributos

Atributo	Valor
Abstrahlwinkel:	120
Ampere:	4
CC oder CV:	CV
CRI:	>80



Atributo	Valor
Dimmbar:	abhängig vom Netzteil
EPREL_ANTI_GLARE_SHIELD:	false
EPREL_BEAM_ANGLE:	Not applicable
EPREL_BEAM_ANGLE_CORRESPONDENCE:	SPHERE_360
EPREL_CAP_TYPE:	/
EPREL_CHROMATICITY_COORD_X:	0.368
EPREL_CHROMATICITY_COORD_Y:	0.363
EPREL_CLAIM_EQUIVALENT_POWER:	false
EPREL_COLOUR_RENDERING_INDEX:	85.1
EPREL_COLOUR_TUNEABLE_LIGHT_SOURCE:	false
EPREL_CONNECTED_LIGHT_SOURCE:	false
EPREL_CORRELATED_COLOUR_TEMP_TYPE:	RANGE
EPREL_DIMENSION_DEPTH:	500
EPREL_DIMENSION_HEIGHT:	2
EPREL_DIMENSION_WIDTH:	10
EPREL_DIMMABLE:	NO
EPREL_DIRECTIONAL:	NDLS
EPREL_ENERGY_CLASS:	F
EPREL_ENERGY_CONS_ON_MODE:	9
EPREL_ENVELOPE:	NO
EPREL_EQUIVALENT_POWER:	Not applicable
EPREL_HIGH_LUMINANCE_LIGHT_SOURCE:	false
EPREL_LIGHTING_TECHNOLOGY:	LED
EPREL_LUMEN_MAINTENANCE_FACTOR:	0.98
EPREL_LUMINOUS_FLUX:	1028
EPREL_MAINS:	NMLS
EPREL_MAX_BEAM_ANGLE:	Not applicable
EPREL_MAX_COLOUR_RENDERING_INDEX:	82
EPREL_MIN_BEAM_ANGLE:	Not applicable
EPREL_MIN_COLOUR_RENDERING_INDEX:	80
EPREL_POWER_ON_MODE:	10.4

Atributo	Valor
EPREL_POWER_STANDBY:	0.00
EPREL_R9_COLOUR_RENDERING_INDEX:	18
EPREL_REGISTRANT_NATURE:	MANUFACTURER
EPREL_SURVIVAL_FACTOR:	1.00
Länge:	5
LED Strip Klebeband:	ja
LED Strip Breite:	10
LED Strip Höhe:	2
LED Strip Klebeband:	ja
LED Strip kürzbar:	100
LED Strip Länge:	5000
Lichtfabe in Kelvin:	4000
Lichtfarbe:	neutralweiß
Lichtfarbe in Kelvin:	4000
Lichtfarbe Name:	neutralweiß
Lumen:	10250
Schutzklasse:	IP20
Volt:	24
Peso:	0.15 Kg

## Imágenes adicionales





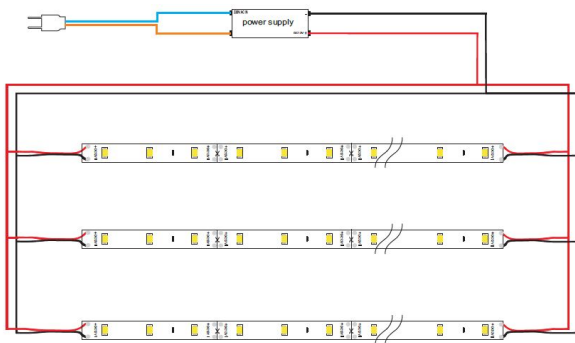

## Accesorios

Número de artículo	Denominación
98273	Synergy 21 LED Flex Strip zub. Testklemmen für Single Color
174020	Synergy 21 Panel 620x620 50W V2, Blanco DUAL, Kit
174654	Synergy 21 LED FLEX Strip zub. Easy Connect I shape for 1 line clear
174653	Synergy 21 LED FLEX Strip zub. Easy Connect I shape for 1 line red
174655	Synergy 21 LED FLEX Strip zub. Easy Connect I shape for 2 line red
174637	Synergy 21 LED FLEX Strip zub. Easy Connect Strip to strip Joint 10/12mm IP67
174633	Synergy 21 LED FLEX Strip zub. Easy Connect Strip to Wire 10/12mm IP67
174645	Synergy 21 LED FLEX Strip zub. Easy Connect Used to add connector to a non-stripped wire
124648	Mean Well LPV-100-24 Alimentación 24V/100W IP67
180907	Mean Well LRS-100-24 Alimentación 24V/108W
181661	Mean Well WPD-06 Dimmer EnOcean wireless PWM