SYNERGY 21

Synergy 21 Tira LED Flex DC24V/6A/144W blanco cálido, 5m

4 0 3 8 8 1 6 0 0 1 8 2 5
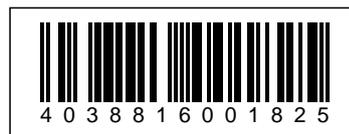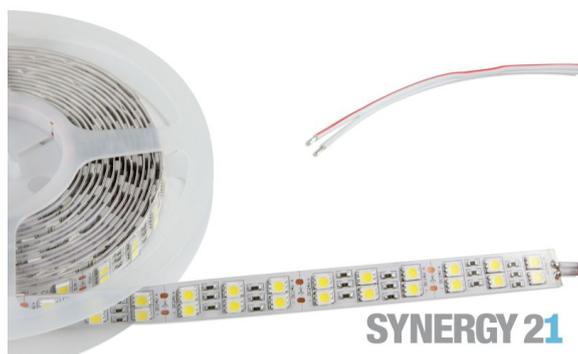
Características técnicas:

- Alimentación: DC24V/6A/144W
- Temperatura termodinámica: 3000K
- Número de LEDs: 600 SMD5050,
- Flujo luminoso: 9300lm,
- Ángulo de enfoque: 120°
- Dimensiones: 5000 x 15 x 2,2mm
- interior

Atributos

Atributo	Valor
Abstrahlwinkel:	120
Ampere:	6
CC oder CV:	CV
CRI:	>80
Dimmbar:	Ja, abhängig vom Netzteil
EPREL_ANTI_GLARE_SHIELD:	false

www.synergy21.de

SYNERGY 21

Atributo	Valor
EPREL_BEAM_ANGLE:	Not applicable
EPREL_BEAM_ANGLE_CORRESPONDENCE:	SPHERE_360
EPREL_CAP_TYPE:	/
EPREL_CHROMATICITY_COORD_X:	0.429
EPREL_CHROMATICITY_COORD_Y:	0.394
EPREL_CLAIM_EQUIVALENT_POWER:	false
EPREL_COLOUR_RENDERING_INDEX:	87.7
EPREL_COLOUR_TUNEABLE_LIGHT_SOURCE:	false
EPREL_CONNECTED_LIGHT_SOURCE:	false
EPREL_CORRELATED_COLOUR_TEMP_TYPE:	RANGE
EPREL_DIMENSION_DEPTH:	500
EPREL_DIMENSION_HEIGHT:	2
EPREL_DIMENSION_WIDTH:	20
EPREL_DIMMABLE:	NO
EPREL_DIRECTIONAL:	NDLS
EPREL_ENERGY_CLASS:	F
EPREL_ENERGY_CONS_ON_MODE:	14
EPREL_ENVELOPE:	NO
EPREL_EQUIVALENT_POWER:	Not applicable
EPREL_HIGH_LUMINANCE_LIGHT_SOURCE:	false
EPREL_LIGHTING_TECHNOLOGY:	LED
EPREL_LUMEN_MAINTENANCE_FACTOR:	0.98
EPREL_LUMINOUS_FLUX:	1549
EPREL_MAINS:	NMLS
EPREL_MAX_BEAM_ANGLE:	Not applicable
EPREL_MAX_COLOUR_RENDERING_INDEX:	82
EPREL_MIN_BEAM_ANGLE:	Not applicable
EPREL_MIN_COLOUR_RENDERING_INDEX:	80
EPREL_POWER_ON_MODE:	15.1
EPREL_POWER_STANDBY:	0.00
EPREL_R9_COLOUR_RENDERING_INDEX:	33.49

www.synergy21.de

SYNERGY 21

Atributo	Valor
EPREL_REGISTRANT_NATURE:	MANUFACTURER
EPREL_SURVIVAL_FACTOR:	1.00
Grad:	120º
Länge:	5
LED Strip Breite:	15
LED Strip Chip Anzahl:	60
LED Strip Chip Typ:	5050
LED Strip Höhe:	2.20
LED Strip Länge:	5000
Lichtfarbe:	Warmweiß
Lichtfarbe Name:	warmweiß
Schutzklasse:	IP20
Volt:	24
Peso:	0.35 Kg
Garantía:	60.00 Meses

Imágenes adicionales

www.synergy21.de

Accesorios

Número de artículo	Denominación
81069	Synergy 21 Enchufe DC con borne de tornillo
81068	Synergy 21 Conector DC con borne de tornillo
81741	Synergy 21 Clip fijación de silicona para tiras LED, Pack de
125198	Mean Well LPV-150-24 Alimentación 24V/150W IP67
93682	Mean Well HLG-150H-24 Alimentación 24V/150W IP65 Regulable

www.synergy21.de

Synergy21 - A Brand of ALLNET GmbH - Maistraße 2 - 82110 Germering - synergy21@allnet.de - 089 / 894 222 22   Página 4/5
Salvo errores y omisiones.

Número de artículo	Denominación
98273	Synergy 21 LED Flex Strip zub. Testklemmen für Single Color
181661	Mean Well WPD-06 Dimmer EnOcean wireless PWM

www.synergy21.de

Synergy21 - A Brand of ALLNET GmbH - Maistraße 2 - 82110 Germering - synergy21@allnet.de - 089 / 894 222 22   Página 5/5
Salvo errores y omisiones.