


## Synergy 21 LED light panel 620\*620 ROW neutral white 30W white UGR



kwh/1000h:	30,00
Lumens:	3550
Watt:	30,0
Nominal Service Life:	35000 Std.
Switching Cycles:	50000
Opt. Ambient Temperature.:	25 °C

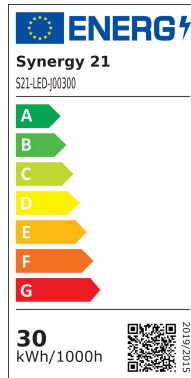

Ultra Slim LED Panel Light, ROW version  
Intended use: Installation in the Odenwald ceiling

Frame colour: white (aluminium)  
Power consumption: 30 watts  
Number of lumens: 3550Lm, Lm/W=120  
Light colour: neutral white 4000  
MacAdam/SDCM = 3  
Colour rendering index (CRI): >80  
SDCM: <=4  
Beam angle: 90° (optics = opal)  
Unified glare rating: UGR<19  
Protection class: IP20 / IK05  
Rated lifetime (L80): 50,000h  
Operating temperature: -20° to +45° (Amb.)  
Power supply: 700mA, 27-42V, 30W, power supply unit see accessories  
Size (external dimensions): 622mm x 622mm x 30mm  
Warranty: 5 years


Energy efficiency class: A++  
kWh/1000h: 30

IES files download: <http://www.synergy21.de/service-support/downloads/lichtberechnung-ies/>



## Attributes

Attribute	Value
Abstrahlwinkel:	90
Ampere:	0.70
CC oder CV:	cc
CRI:	80
Dimmbar:	Nein
Grösse:	620*620
LED - Gehäusefarbe:	weiß
Lichtfarbe:	neutralweiß
Lichtfarbe in Kelvin:	4000
Lumen:	4200
Schutzklasse:	IP40
UGR:	<19
Weight:	1.5 Kg
Warranty:	60.00 Months

## Additional Images

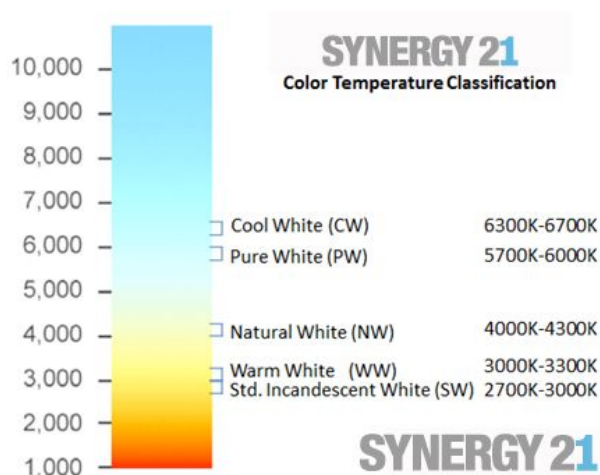

Dimension A (mm)	Dimension B (mm)	Dimension C (mm)
622±1	622±1	30±1

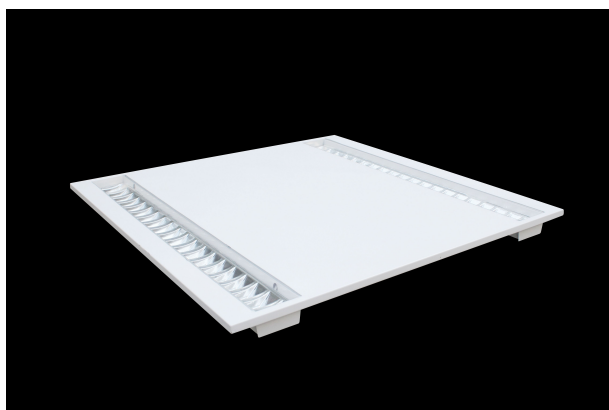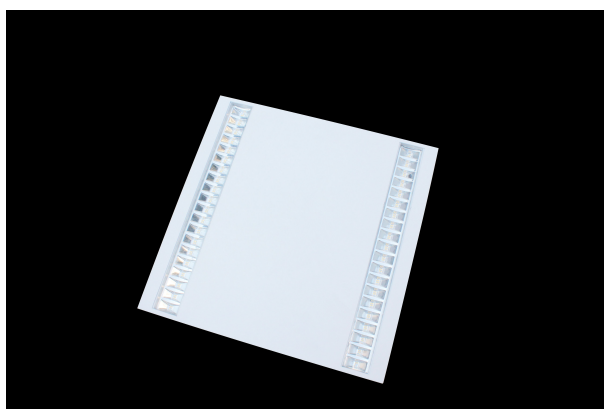

## Accessories

Part No.	Name
149090	Synergy 21 LED light panel 620*620 with standard power supply 35W PRO V3 Triac DIM
149092	Synergy 21 LED light panel 620*620 with standard power supply 35W PRO V3 DALI DIM