


Synergy 21 LED recessed ceiling spot Prometheus mini-max dual white (CCT) V2



SYNERGY 21

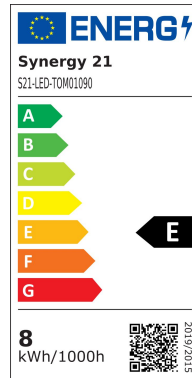

kwh/1000h:	8,00
Lumens:	880
Watt:	8,0
Nominal Service Life:	35000 Std.
Switching Cycles:	50000
Opt. Ambient Temperature.:	25 °C




8 watt recessed ceiling spotlight
Anodised aluminium surface, matt finish
Power supply: 12 Volt
Beam angle : 60 °
LED chip: 8x1 watt, 4x1 watt warm white, 4x1 watt cold white
Lumen: 960lm, 120lm/w
Kelvin: 3000 ± 250, 6250 ± 250
Head diameter: 93 mm
Total height: 80 mm
Spring clip with plastic coating
Frosted glass disc
two-part, recessed ceiling ring and luminaire body with cooling

Bolt circle: $\varnothing 74.4\text{mm}$ => saw $\varnothing 75$ or $\varnothing 76$

Energy efficiency class: A++
kWh/1000h: 8

Additional Images

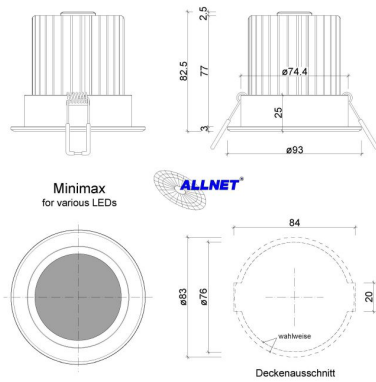

Accessories

Part No.	Name
135731	Synergy 21 LED Controller 3653 LED RGB-WW (RGB-CCT) Master Set
90560	Synergy 21 LED zub Screw Terminal KEFA (Phoenix® compatible) Plug 5 F
90562	Synergy 21 LED zub screw terminal KEFA (Phoenix® compatible) plug 5 M
102189	PortaLuce® Lightcontroller N°3458 Distributor
136728	Mean Well Power Supply - 12V 60W IP67