

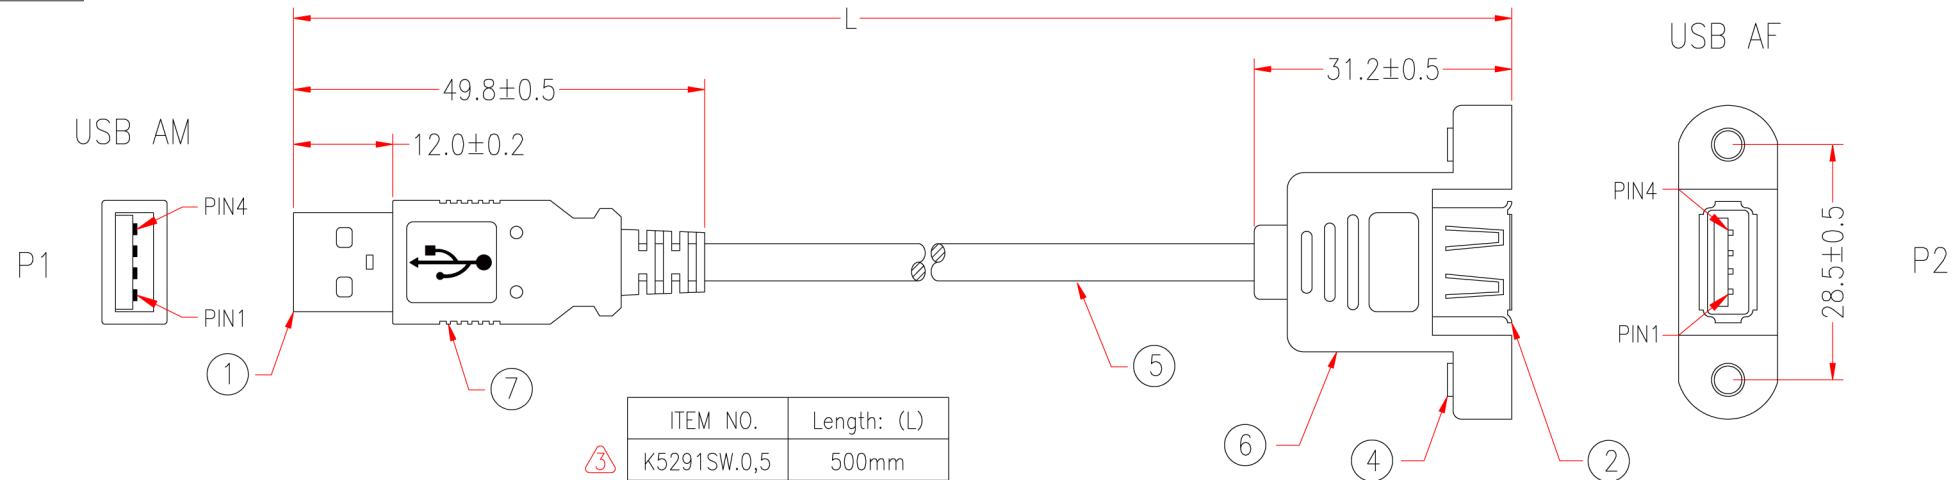


P1:	M-942H
P2:	M-Y930A
	M-930B

Customer No:	No.6
--------------	------




ITEM NO.	Length: (L)
K5291SW.0,5	500mm
K5291SW.1	1000mm
K5291SW.1,8	1800mm
K5291SW.2,2	2200mm
K5291SW.3	3000mm

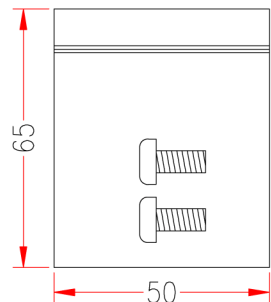

SCREW 5.5*8mm(2pcs)

* NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
7	MOLDED PVC BLACK		M304
6	BLACK HEAT SHRINK RUBE ϕ 1.0*8mm	1	M959
	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC BLACK		M304
5	USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 24AWG, OD 4.5mm, JACKET BLACK, DRAWING No. EUAB2801P2402C-015	L-20mm	M304
4	HEX-NUT 5*7.7mm, #4-40	2	M95
3	SCREW #4-40 5.5*8mm	2	M95
2	USB A FEMALE 2.0, GOLD PLATING 30u" ON CONTACTS, WHITE INSULATOR	1	M108
1	USB A MALE 2.0, GOLD PLATING 30u" ON CONTACTS, WHITE INSULATOR, SHORT A PIERCE TYPE	1set	M108

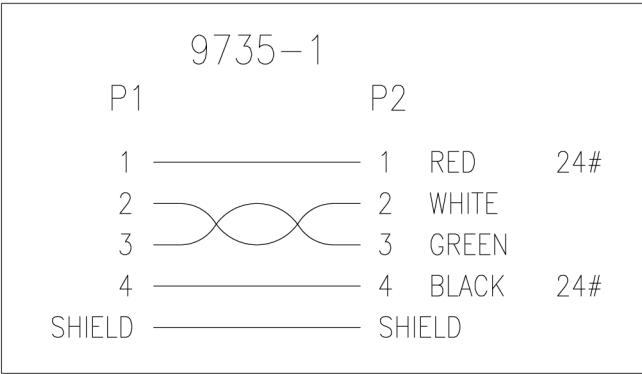

④	RE.4 2012.7.09	MODIFY ITEM NO. K5291SW.2,2
③	RE.3 2009.1.07	MODIFY ITEM NO. K5291SW.0,5
②	RE.2 2008.2.12	MODIFY LENGTH FOR 2M TO 1.8M
①	RE.1 2008.1.25	MODIFY ITEM NO. K5291SW.3

PART NO. 9735-1		Revision: -		Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
APPROVED				
CHECKED	HU			
DRAWING	MAO			
DATE	09/JUL/12	ITEM NO.	K5291SW.X	UNIT:mm