


Synergy 21 LED office line ceiling panel white, dimmable



| | |
|----------------------------|------------|
| kwh/1000h: | 66,00 |
| Lumens: | 5750 |
| Watt: | 60,0 |
| Nominal Service Life: | 35000 Std. |
| Switching Cycles: | 50000 |
| Opt. Ambient Temperature.: | 25 °C |

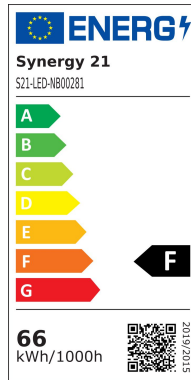

LED panel office line
Suitable for ceiling mounting (workplace lighting)

Frame colour: white RAL9003
Power consumption: 60Watt, 10W up, 50W down
Lumen output: 5750lm
Neutral white: 4100k ±150
Colour rendering: CRI >80
UGR: <19 with light downwards, no UGR upwards
Beam angle: 120° (total)
Operating temperature: -20° to +45°
Power supply: 100-240V
Power supply: built-in power supply 0-10V dimmable
Size: 1200mm x 260mm x 30mm
Aluminium housing incl. ceiling mounting kit

Energy efficiency class: A++
kWh/1000h: 66

Attributes

| Attribute | Value |
|-----------|-------|
|-----------|-------|

| | |
|-----------------------|--------------|
| Abstrahlwinkel: | 120 |
| CRI: | 80 |
| Dimmbar: | Ja |
| Grösse: | 1200*260 |
| LED - Gehäusefarbe: | weiß |
| Lichtfarbe: | neutralweiß |
| Lichtfarbe in Kelvin: | 4100 |
| Lumen: | 5750 |
| Weight: | 4 Kg |
| Warranty: | 60.00 Months |

Additional Images



