


Synergy 21 LED recessed floor strip ARGOS ww 1m



kwh/1000h:	4,80
Lumens:	320
Watt:	4,8
Nominal Service Life:	35000 Std.
Switching Cycles:	50000
Opt. Ambient Temperature.:	25 °C

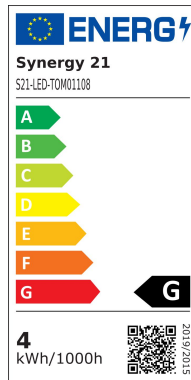

LED Flex Strip warm white, IP68, white PCB
DC12V, max. 0.4A, 4.8W ± 10%,
Light colour: 3000K ±150 warm white
Brightness: 320lm
100Leds, 120°, 3528SMD
Beam angle: 120°
Length: 1000*10*5mm,
IP68, filled tube
can be shortened:all 3 LEDs
with ARGOS plug
Suitable up to -25°C!

Strip can be shortened at marking points with sharp scissors.
!Attention! Strip must first be checked for functionality.
Only split the strip when no current is applied.

Our 3M adhesive tape adheres well, but should only be used as a mounting aid.
There are a variety of mounting options, such as clips, permanent mounting adhesive, cable ties, etc.

Energy efficiency class: A
kWh/1000h: 4.8

Please note that LED strips also need to be cooled.
Make sure that the LED strip does not exceed the operating temperature of 40°C, otherwise the service life cannot be guaranteed.

Attributes

Attribute	Value
Abstrahlwinkel:	120
Ampere:	0.40
CC oder CV:	CV
Lichtfarbe:	warmweiß
Schutzklasse:	IP68
Volt:	12
Weight:	0.075 Kg

Accessories

Part No.	Name
109469	Synergy 21 LED in ground ARGOS zub Tee IP67
109460	Synergy 21 ARGOS LED in-ground spotlight with twilight sensor IP67
109461	Synergy 21 LED in ground ARGOS zub extension cable IP67 1m
109462	Synergy 21 LED in ground ARGOS zub Extension Cable IP67 2m
109463	Synergy 21 LED in ground ARGOS zub Extension Cable IP67 3m
109471	Synergy 21 LED recessed floor spotlight ARGOS with junction box IP67
109467	Synergy 21 LED recessed floor floodlight ARGOS with distribution cable IP67
109473	Synergy 21 LED in ground ARGOS zub end cap IP67
109458	Synergy 21 LED in ground ARGOS zub power supply 12V / 30W IP67
109456	Synergy 21 LED recessed floor floodlight ARGOS with power supply 12V / 3W IP67
109457	Synergy 21 LED in ground ARGOS zub power supply 12V / 8W IP67